

Kombinerad analys

Report generated using GeoStudio 2007, version 7.16. Copyright © 1991-2010 GEO-SLOPE International Ltd.

File Information

Created By: [Saad Jamil](#)
Revision Number: [380](#)
Last Edited By: [Jamil, Saad](#)
Date: [2010-12-14](#)
Time: [14:43:20](#)
File Name: [40150WKS.gsz](#)
Directory: [V:_UPPDRAG\224784\Teknik\Delområde 1-10\Delområde 4-14084\Geoteknik\Beräkningar\Sektion 8\](#)
Last Solved Date: [2010-12-14](#)
Last Solved Time: [14:44:40](#)

Project Settings

Length(L) Units: [meters](#)
Time(t) Units: [Seconds](#)
Force(F) Units: [kN](#)
Pressure(p) Units: [kPa](#)
Strength Units: [kPa](#)
Unit Weight of Water: [9.807 kN/m³](#)
View: [2D](#)

Analysis Settings

Kombinerad analys, befintliga förhållanden, nulägesanalys

Description: [V40/150 kombinerad analys](#)
Kind: [SLOPE/W](#)
Method: [Morgenstern-Price](#)
Settings
 Side Function
 Interslice force function option: [Half-Sine](#)
 PWP Conditions Source: [Pressure Head Spatial Function](#)
 Pressure Head Spatial Fn.: [Nulägesanalys](#)
Slip Surface
 Direction of movement: [Right to Left](#)
 Use Passive Mode: [No](#)
 Slip Surface Option: [Entry and Exit](#)
 Critical slip surfaces saved: [20](#)
 Optimize Critical Slip Surface Location: [Yes](#)
 Tension Crack
 Tension Crack Option: [\(none\)](#)
FOS Distribution
 FOS Calculation Option: [Constant](#)
Advanced

Number of Slices: 30
 Optimization Tolerance: 0.01
 Minimum Slip Surface Depth: 0.5 m
 Optimization Maximum Iterations: 2000
 Optimization Convergence Tolerance: 1e-007
 Starting Optimization Points: 8
 Ending Optimization Points: 16
 Complete Passes per Insertion: 1
 Driving Side Maximum Convex Angle: 5 °
 Resisting Side Maximum Convex Angle: 1 °

Materials

Crust co

Model: Combined, S=f(depth)
 Unit Weight: 18 kN/m³
 Phi: 30 °
 C-Top of Layer: 0 kPa
 C-Rate of Change: 0 kPa/m
 Cu-Top of Layer: 30 kPa
 Cu-Rate of Change: 0 kPa/m
 C/Cu Ratio: 0.1

Clay 1 co

Model: Combined, S=f(depth)
 Unit Weight: 15.5 kN/m³
 Phi: 30 °
 C-Top of Layer: 0 kPa
 C-Rate of Change: 0 kPa/m
 Cu-Top of Layer: 10 kPa
 Cu-Rate of Change: 1 kPa/m
 C/Cu Ratio: 0.1

Clay 2 co

Model: Combined, S=f(depth)
 Unit Weight: 15.5 kN/m³
 Phi: 30 °
 C-Top of Layer: 0 kPa
 C-Rate of Change: 0 kPa/m
 Cu-Top of Layer: 15 kPa
 Cu-Rate of Change: 0 kPa/m
 C/Cu Ratio: 0.1

Friction

Model: Mohr-Coulomb
 Unit Weight: 22 kN/m³
 Unit Wt. Above Water Table: 20 kN/m³
 Cohesion: 0 kPa
 Phi: 38 °
 Phi-B: 0 °

Bedrock

Model: Bedrock (Impenetrable)

Sand

Model: Mohr-Coulomb

Unit Weight: 20 kN/m³

Unit Wt. Above Water Table: 18 kN/m³

Cohesion: 0 kPa

Phi: 33 °

Phi-B: 0 °

Strandskoning

Model: Mohr-Coulomb


Unit Weight: 21 kN/m³


Unit Wt. Above Water Table: 18 kN/m³

Cohesion: 0 kPa

Phi: 40 °

Phi-B: 0 °

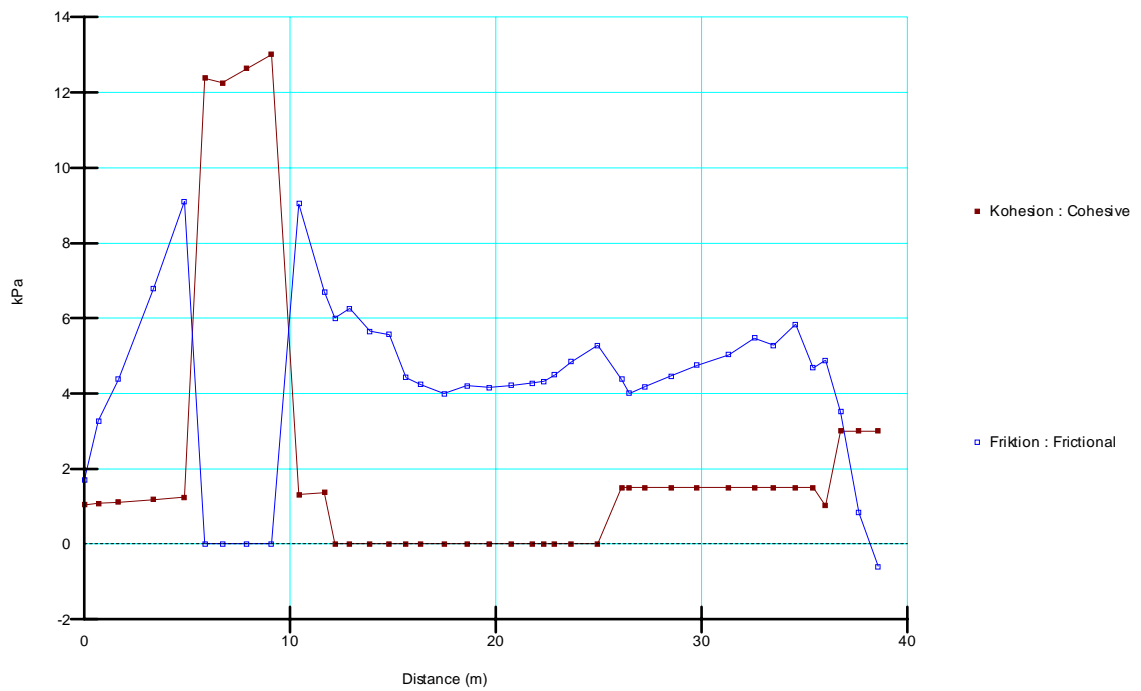


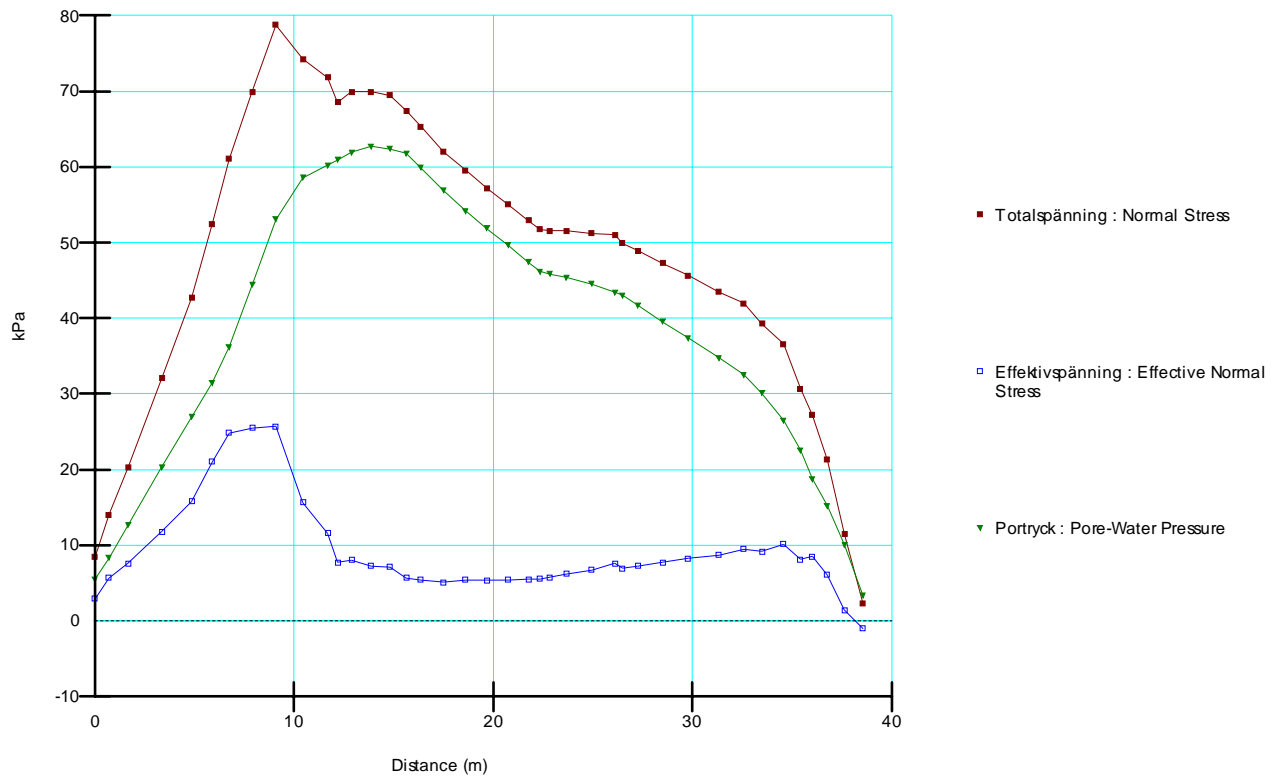



Skala 1:800 (A3)
Leveransdatum 2011-03-31

Göta älv utredningen 2009-2012
SEKTION: V40/150 kombinerad analys
Beräkningsmodell: Morgenstern-Price
Metod: Entry and Exit
Portrycksmodell: Pressure Head Spatial Function
Datum: 2010-12-14

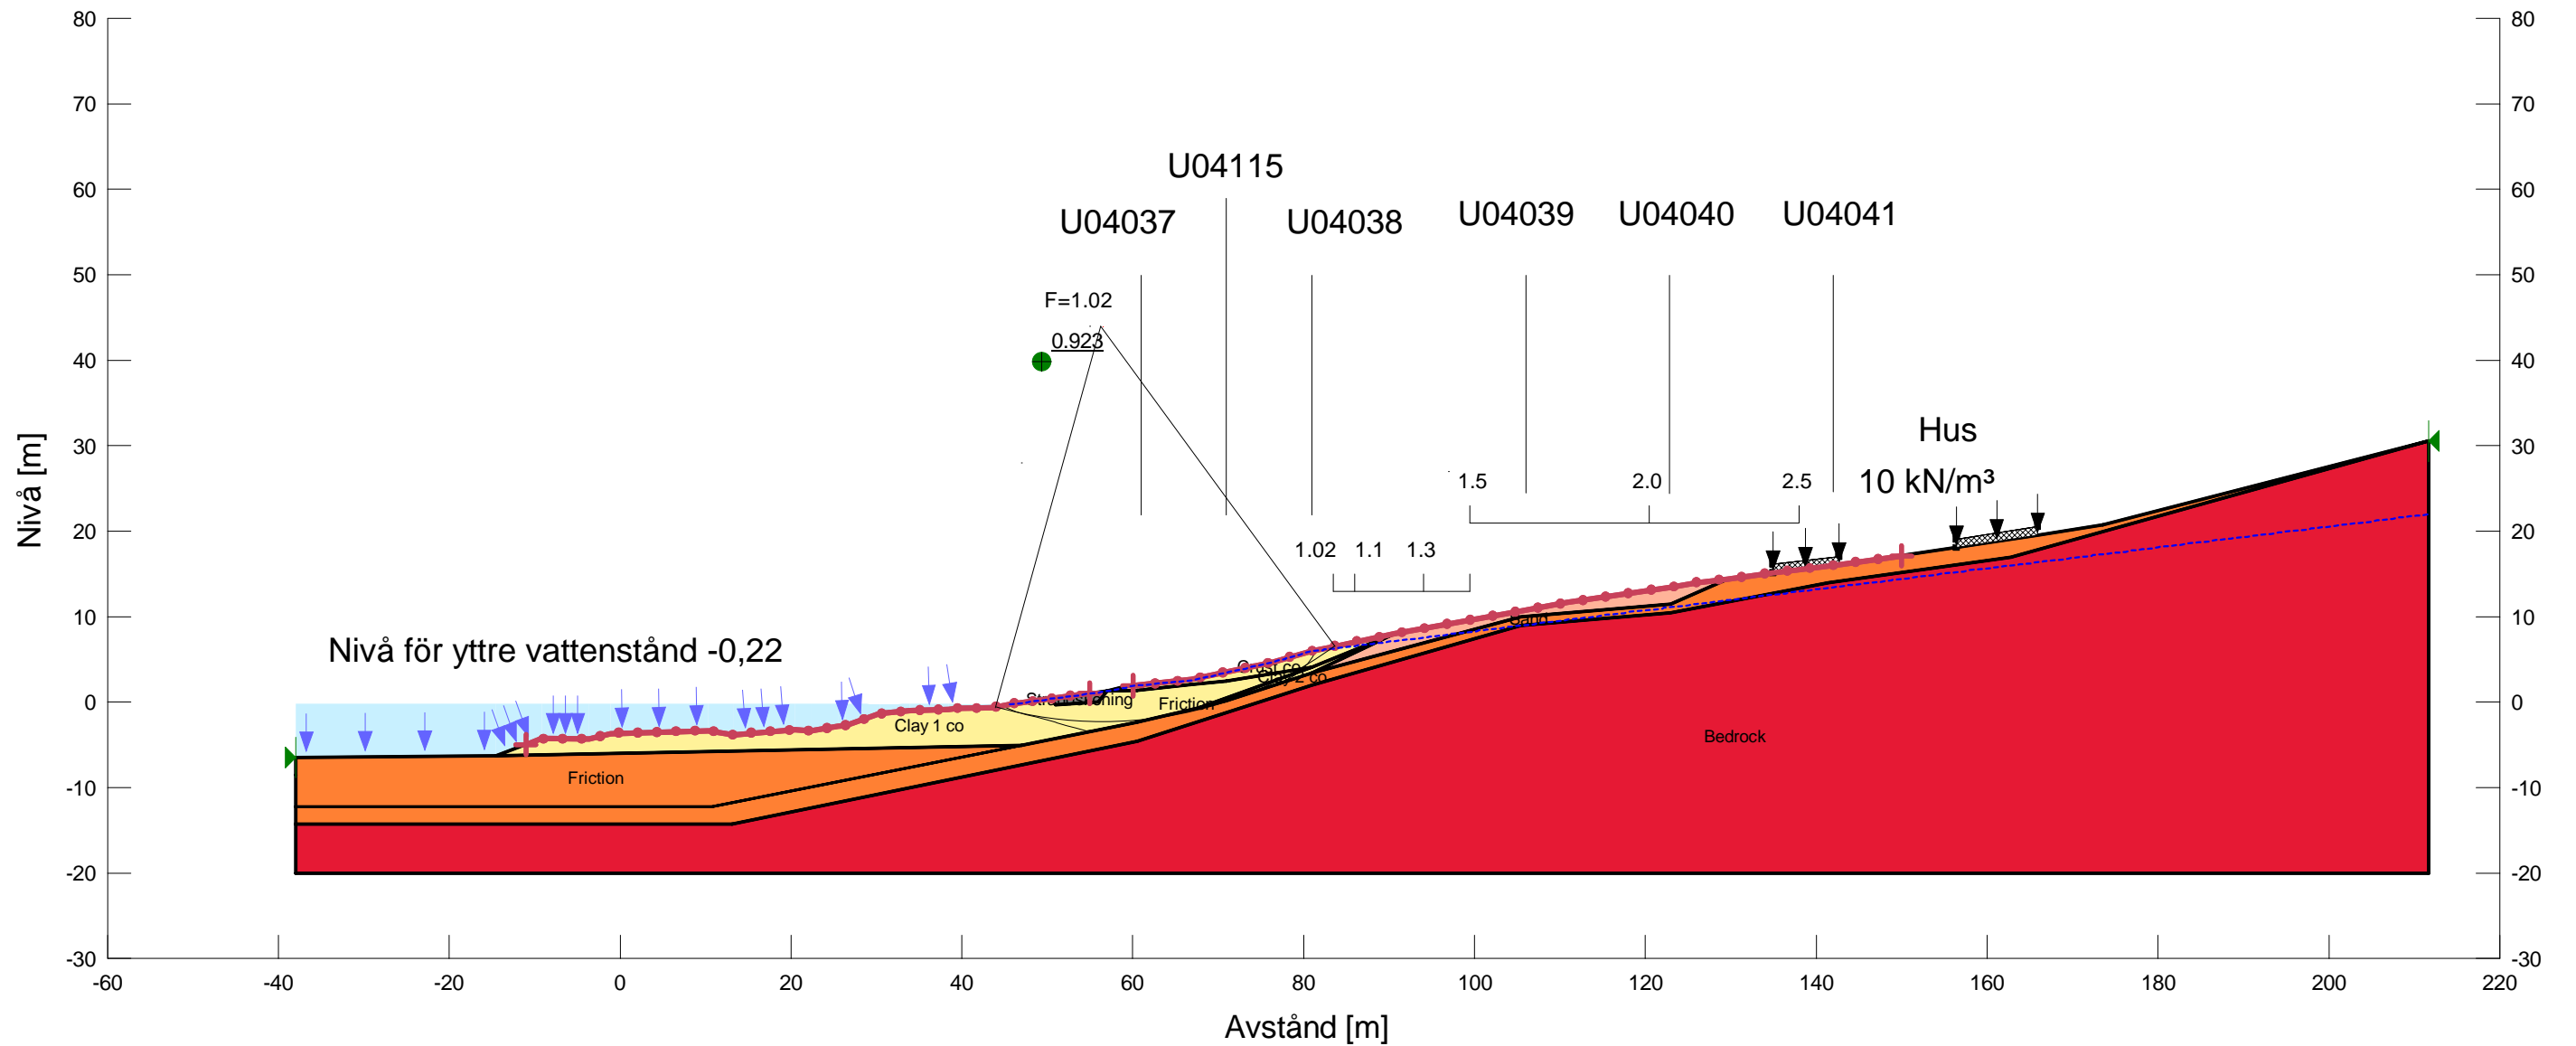



Skala 1:800 (A3)
Leveransdatum 2011-03-31

Göta älv utredningen 2009-2012
SEKTION: V40/150 kombinerad analys
Beräkningsmodell: Morgenstern-Price
Metod: Entry and Exit
Portrycksmodell: Pressure Head Spatial Function
Datum: 2010-12-14

