

SLOPE/W Analysis

Report generated using GeoStudio 2007, version 7.17. Copyright © 1991-2010 GEO-SLOPE International Ltd.

File Information

Created By: [Kine Meijer](#)
Revision Number: [118](#)
Last Edited By: [Kine Meijer](#)
Date: [2011-07-11](#)
Time: [01:54:37](#)
File Name: [V15500_odrainerad EE.gsz](#)
Directory: [P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V15500\Beräkningar\](#)
Last Solved Date: [2011-07-11](#)
Last Solved Time: [01:55:26](#)

Project Settings

Length(L) Units: [meters](#)
Time(t) Units: [Seconds](#)
Force(F) Units: [kN](#)
Pressure(p) Units: [kPa](#)
Strength Units: [kPa](#)
Unit Weight of Water: [9.807 kN/m³](#)
View: [2D](#)

Analysis Settings

SLOPE/W Analysis

Kind: [SLOPE/W](#)
Method: [Morgenstern-Price](#)
Settings
Apply Phreatic Correction: [No](#)
Side Function
Interslice force function option: [Half-Sine](#)
PWP Conditions Source: [Piezometric Line](#)
Use Staged Rapid Drawdown: [No](#)
Slip Surface
Direction of movement: [Right to Left](#)
Use Passive Mode: [No](#)
Slip Surface Option: [Entry and Exit](#)
Critical slip surfaces saved: [5](#)
Optimize Critical Slip Surface Location: [Yes](#)
Tension Crack

Tension Crack Option: Tension Crack Line

Percentage Wet: 0.5

Tension Crack Fluid Unit Weight: 9.807 kN/m³

FOS Distribution

FOS Calculation Option: Constant

Advanced

Number of Slices: 30

Optimization Tolerance: 0.01

Minimum Slip Surface Depth: 0.1 m

Optimization Maximum Iterations: 2000

Optimization Convergence Tolerance: 1e-007

Starting Optimization Points: 8

Ending Optimization Points: 16

Complete Passes per Insertion: 1

Driving Side Maximum Convex Angle: 5 °

Resisting Side Maximum Convex Angle: 1 °

Materials

CI 1

Model: $S=f(\text{datum})$

Unit Weight: 17.8 kN/m³

C-Datum: 25 kPa

C-Rate of Change: 0 kPa/m

Limiting C: 0 kPa

Elevation: 15 m

Pore Water Pressure

Piezometric Line: 1

CI 2

Model: $S=f(\text{datum})$

Unit Weight: 17.2 kN/m³

C-Datum: 25 kPa

C-Rate of Change: 3.1 kPa/m

Limiting C: 62 kPa

Elevation: 5 m

Pore Water Pressure

Piezometric Line: 1

CI 3

Model: $S=f(\text{depth})$

Unit Weight: 16.4 kN/m³

C-Top of Layer: 3 kPa

C-Rate of Change: 0 kPa/m

Limiting C: 3 kPa

Pore Water Pressure

Piezometric Line: 1

CI 4

Model: $S=f(\text{depth})$

Unit Weight: 16.4 kN/m³

C-Top of Layer: 3 kPa

C-Rate of Change: 5.33 kPa/m

Limiting C: 70 kPa

Pore Water Pressure

Piezometric Line: 1

Crust

Model: Mohr-Coulomb

Unit Weight: 18 kN/m³

Cohesion: 3 kPa

Phi: 30 °

Phi-B: 0 °

Pore Water Pressure

Piezometric Line: 1

CI 5

Model: $S=f(\text{datum})$

Unit Weight: 17.8 kN/m³

C-Datum: 53 kPa


C-Rate of Change: 2 kPa/m

Limiting C: 0 kPa


Elevation: -5 m

Pore Water Pressure

Piezometric Line: 1

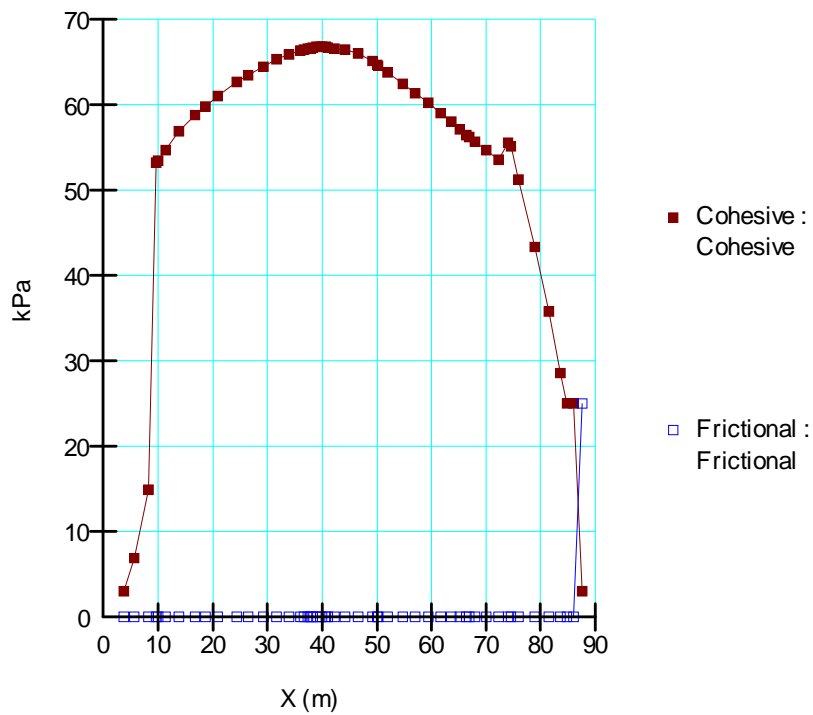

Figur 1 Kohesion och friktion.

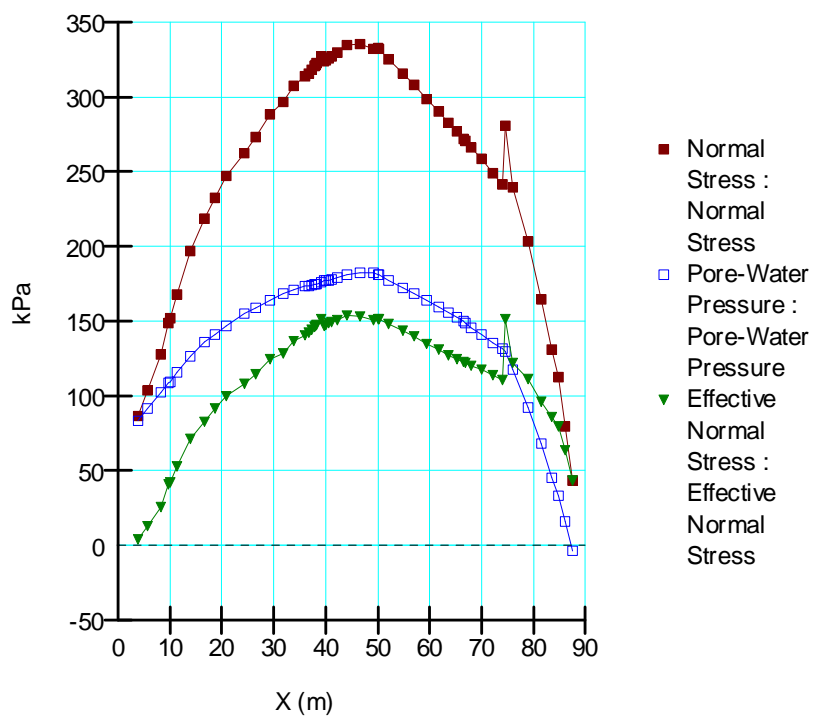

Figur 2 Totalspänning, portryck och effektivspänning.




KLIMATANPASSNING SKREDFÖRUTSÄTTNINGAR I GÖTA ÄLVDALEN

Sektion: V15500
 Delområde: Intagan - Ström
 Analysmetod: Odränerad analys

Slip Surface Option: Entry and Exit
 Method: Morgenstern-Price
 PWP Conditions Source: Piezometric Line
 Date: 2011-07-11
 Created By: Kine Meijer
 Last Edited By: Kine Meijer

Skala 1:1000 (A3)

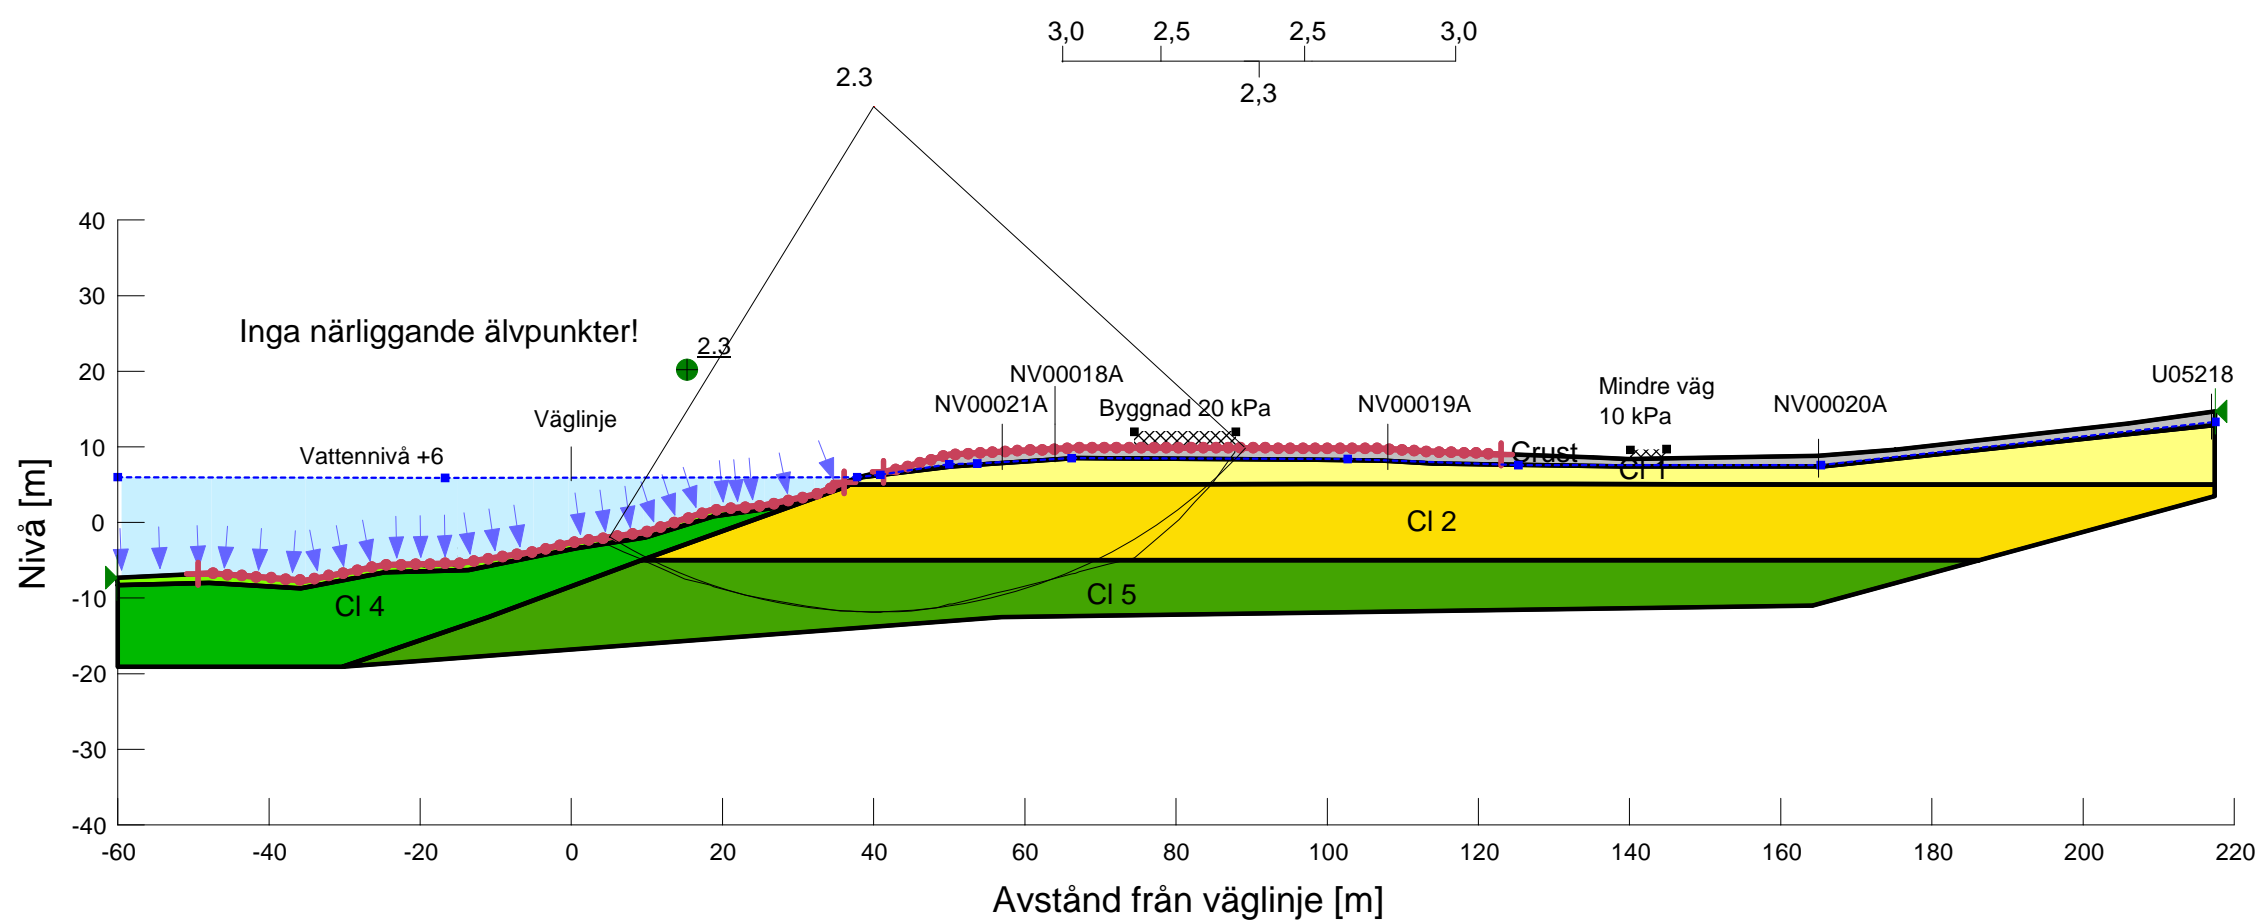

Name: CI 1
 Model: $S=f(\text{datum})$
 Unit Weight: 17.8 kN/m³
 C-Datum: 25 kPa
 C-Rate of Change: 0 kPa/m
 Limiting C: 0 kPa

Name: CI 2
 Model: $S=f(\text{datum})$
 Unit Weight: 17.2 kN/m³
 C-Datum: 25 kPa
 C-Rate of Change: 3.1 kPa/m
 Limiting C: 62 kPa

Name: CI 3
 Model: $S=f(\text{depth})$
 Unit Weight: 16.4 kN/m³
 C-Top of Layer: 3 kPa
 C-Rate of Change: 0 kPa/m
 Limiting C: 3 kPa

Name: CI 4
 Model: $S=f(\text{depth})$
 Unit Weight: 16.4 kN/m³
 C-Top of Layer: 3 kPa
 C-Rate of Change: 5.33 kPa/m
 Limiting C: 70 kPa

Name: Crust
 Model: Mohr-Coulomb
 Unit Weight: 18 kN/m³
 Cohesion: 3 kPa
 Phi: 30 °

Name: CI 5
 Model: $S=f(\text{datum})$
 Unit Weight: 17.8 kN/m³
 C-Datum: 53 kPa
 C-Rate of Change: 2 kPa/m
 Limiting C: 0 kPa

Directory: P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V15500\Beräkningar\110710\
 File Name: V15500_odränerad EEprint.gsz

SLOPE/W Analysis

Report generated using GeoStudio 2007, version 7.17. Copyright © 1991-2010 GEO-SLOPE International Ltd.

File Information

Created By: [Kine Meijer](#)
Revision Number: [119](#)
Last Edited By: [Kine Meijer](#)
Date: [2011-07-11](#)
Time: [01:45:18](#)
File Name: [V15500_kombinerad EE print.gsz](#)
Directory: [P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V15500\Beräkningar\110710\](#)

Project Settings

Length(L) Units: [meters](#)
Time(t) Units: [Seconds](#)
Force(F) Units: [kN](#)
Pressure(p) Units: [kPa](#)
Strength Units: [kPa](#)
Unit Weight of Water: [9.807 kN/m³](#)
View: [2D](#)

Analysis Settings

SLOPE/W Analysis

Kind: [SLOPE/W](#)
Method: [Morgenstern-Price](#)
Settings
 Apply Phreatic Correction: [No](#)
 Side Function
 Interslice force function option: [Half-Sine](#)
 PWP Conditions Source: [Piezometric Line](#)
 Use Staged Rapid Drawdown: [No](#)
Slip Surface
 Direction of movement: [Right to Left](#)
 Use Passive Mode: [No](#)
 Slip Surface Option: [Entry and Exit](#)
 Critical slip surfaces saved: [5](#)
 Optimize Critical Slip Surface Location: [Yes](#)
Tension Crack
 Tension Crack Option: [Tension Crack Line](#)
 Percentage Wet: [0.5](#)

Tension Crack Fluid Unit Weight: 9.807 kN/m³

FOS Distribution

FOS Calculation Option: Constant

Advanced

Number of Slices: 30

Optimization Tolerance: 0.01

Minimum Slip Surface Depth: 0.1 m

Optimization Maximum Iterations: 2000

Optimization Convergence Tolerance: 1e-007

Starting Optimization Points: 8

Ending Optimization Points: 16

Complete Passes per Insertion: 1

Driving Side Maximum Convex Angle: 5 °

Resisting Side Maximum Convex Angle: 1 °

Materials

CI 1

Model: Combined, S=f(datum)

Unit Weight: 17.8 kN/m³

Phi: 30 °

C-Datum: 0 kPa

C-Rate of Change: 0 kPa/m

Cu-Datum: 25 kPa

Cu-Rate of Change: 0 kPa/m

C/Cu Ratio: 0.1

Elevation: 15 m

Pore Water Pressure

Piezometric Line: 1

CI 2

Model: Combined, S=f(datum)

Unit Weight: 17.2 kN/m³

Phi: 30 °

C-Datum: 0 kPa

C-Rate of Change: 0 kPa/m

Cu-Datum: 25 kPa

Cu-Rate of Change: 3.1 kPa/m

C/Cu Ratio: 0.1

Elevation: 5 m

Pore Water Pressure

Piezometric Line: 1

CI 3

Model: Combined, S=f(depth)

Unit Weight: 16.4 kN/m³

Phi: 30 °
C-Top of Layer: 0 kPa
C-Rate of Change: 0 kPa/m
Cu-Top of Layer: 3 kPa
Cu-Rate of Change: 0 kPa/m
C/Cu Ratio: 0.1
Pore Water Pressure
Piezometric Line: 1

CI 4


Model: Combined, $S=f(\text{depth})$
Unit Weight: 16.4 kN/m³
Phi: 30 °
C-Top of Layer: 0 kPa
C-Rate of Change: 0 kPa/m
Cu-Top of Layer: 3 kPa
Cu-Rate of Change: 5.33 kPa/m
C/Cu Ratio: 0.1
Pore Water Pressure
Piezometric Line: 1

Crust


Model: Mohr-Coulomb
Unit Weight: 18 kN/m³
Cohesion: 30 kPa
Phi: 0 °
Phi-B: 0 °
Pore Water Pressure
Piezometric Line: 1

CI 5

Model: Combined, $S=f(\text{datum})$
Unit Weight: 17.8 kN/m³
Phi: 30 °
C-Datum: 0 kPa
C-Rate of Change: 0 kPa/m
Cu-Datum: 53 kPa
Cu-Rate of Change: 2 kPa/m
C/Cu Ratio: 0.1
Elevation: -5 m
Pore Water Pressure
Piezometric Line: 1

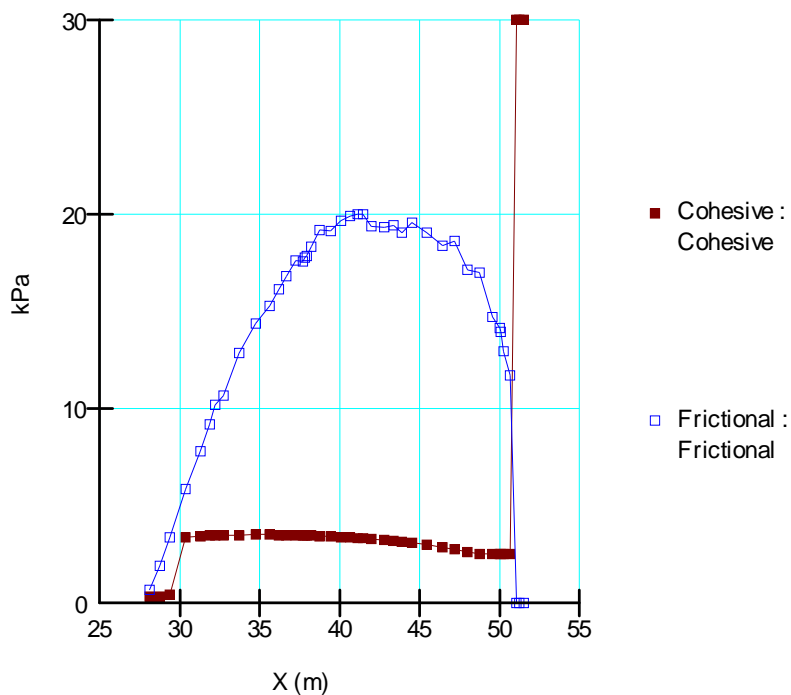

Figur 1 Kohesion och friktion.

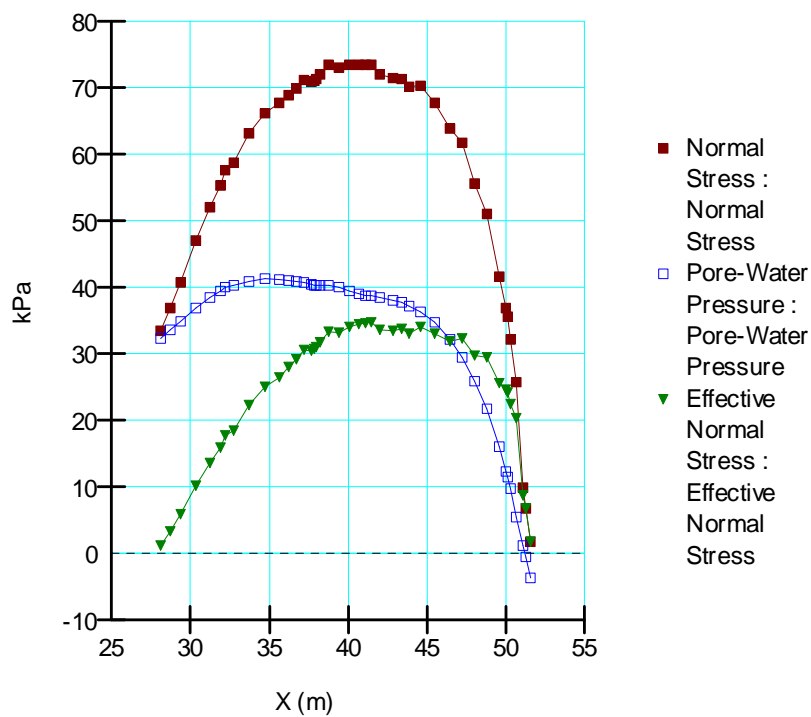


Figur 2 Totalspänning, portryck och effektivspänning.



KLIMATANPASSNING SKREDFÖRUTSÄTTNINGAR I GÖTA ÄLVDALLEN

Sektion: V15500
 Delområde: Intagan - Ström
 Analysmetod: Kombinerad analys

Slip Surface Option: Entry and Exit
 Method: Morgenstern-Price
 PWP Conditions Source: Piezometric Line
 Date: 2011-07-11
 Created By: Kine Meijer
 Last Edited By: Kine Meijer

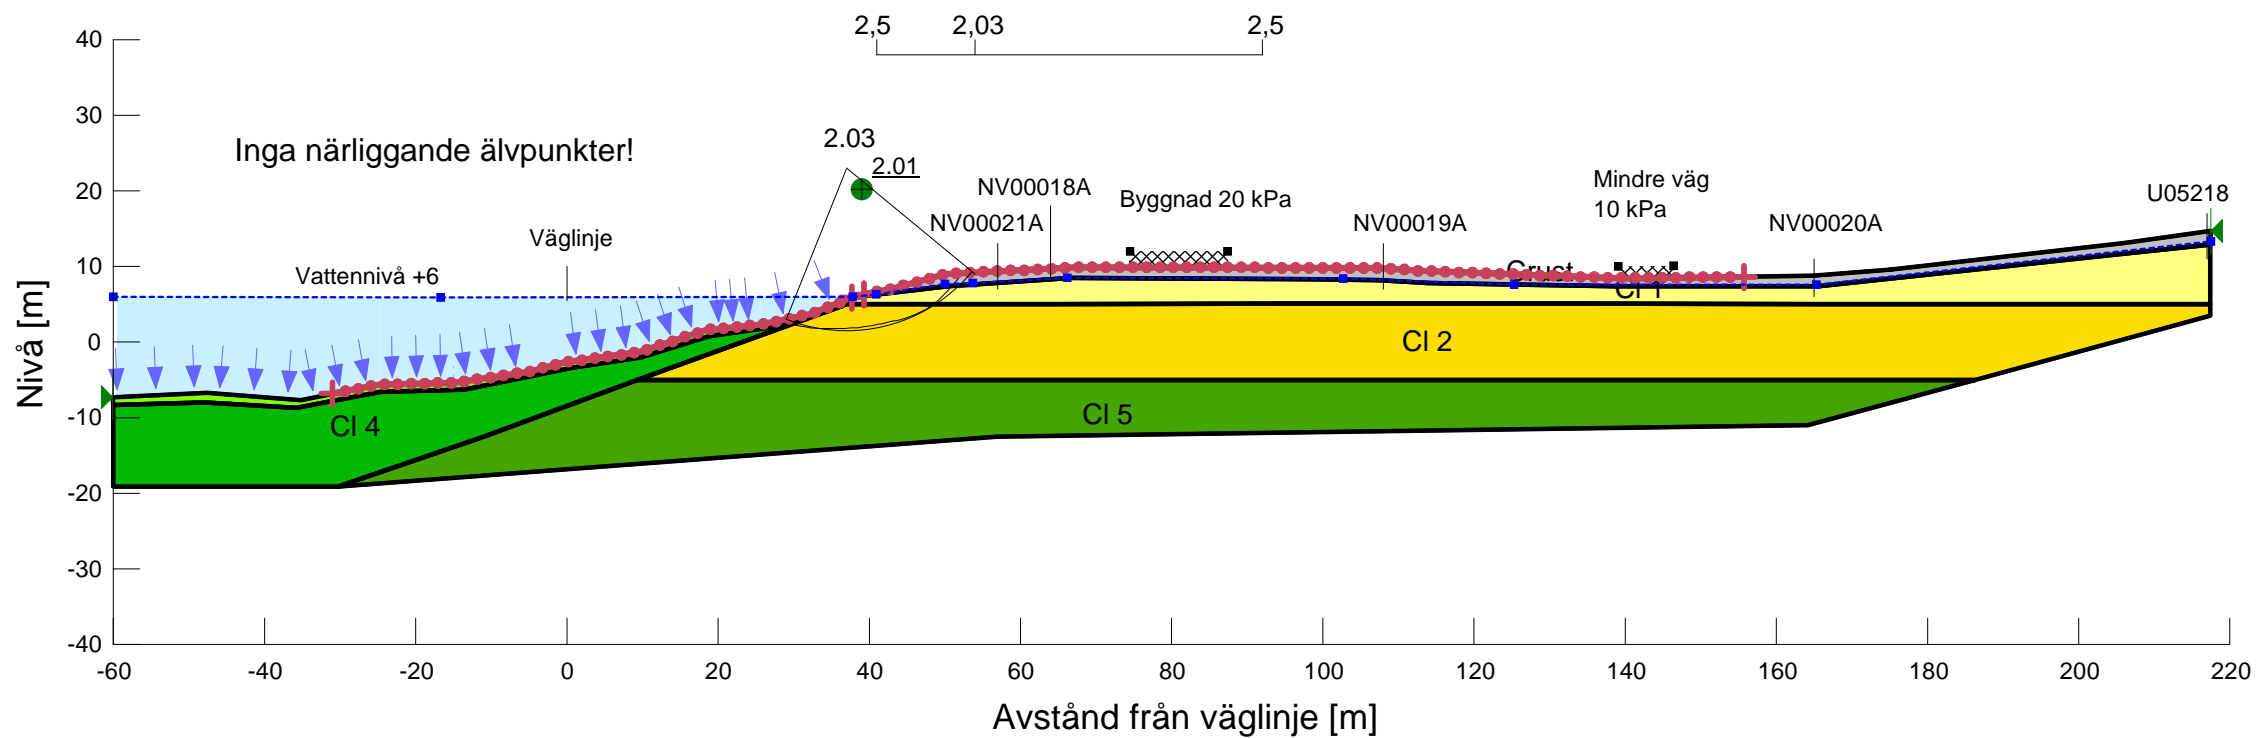

Skala 1:1000 (A3)

Name: CI 1
 Model: Combined, $S=f(\text{datum})$
 Unit Weight: 17.8 kN/m³
 Phi: 30 °
 C-Datum: 0 kPa
 C-Rate of Change: 0 kPa/m
 Cu-Datum: 25 kPa
 Cu-Rate of Change: 0 kPa/m
 C/Cu Ratio: 0.1

Name: CI 2
 Model: Combined, $S=f(\text{datum})$
 Unit Weight: 17.2 kN/m³
 Phi: 30 °
 C-Datum: 0 kPa
 C-Rate of Change: 0 kPa/m
 Cu-Datum: 25 kPa
 Cu-Rate of Change: 3.1 kPa/m
 C/Cu Ratio: 0.1

Name: CI 3
 Model: Combined, $S=f(\text{depth})$
 Unit Weight: 16.4 kN/m³
 Phi: 30 °
 C-Top of Layer: 0 kPa
 C-Rate of Change: 0 kPa/m
 Cu-Top of Layer: 3 kPa
 Cu-Rate of Change: 0 kPa/m
 C/Cu Ratio: 0.1

Name: CI 4
 Model: Combined, $S=f(\text{depth})$
 Unit Weight: 16.4 kN/m³
 Phi: 30 °
 C-Top of Layer: 0 kPa
 C-Rate of Change: 0 kPa/m
 Cu-Top of Layer: 3 kPa
 Cu-Rate of Change: 5.33 kPa/m
 C/Cu Ratio: 0.1

Name: Crust
 Model: Mohr-Coulomb
 Unit Weight: 18 kN/m³
 Cohesion: 30 kPa
 Phi: 0 °


Name: CI 5
 Model: Combined, $S=f(\text{datum})$
 Unit Weight: 17.8 kN/m³
 Phi: 30 °
 C-Datum: 0 kPa
 C-Rate of Change: 0 kPa/m
 Cu-Datum: 53 kPa
 Cu-Rate of Change: 2 kPa/m
 C/Cu Ratio: 0.1



KLIMATANPASSNING SKREDFÖRUTSÄTTNINGAR I GÖTA ÄLVDALEN

Sektion: V15500
 Delområde: Intagan - Ström
 Analysmetod: Kombinerad analys

Slip Surface Option: Entry and Exit
 Method: Morgenstern-Price
 PWP Conditions Source: Piezometric Line
 Date: 2011-08-17
 Created By: Kine Meijer
 Last Edited By: Kine Meijer

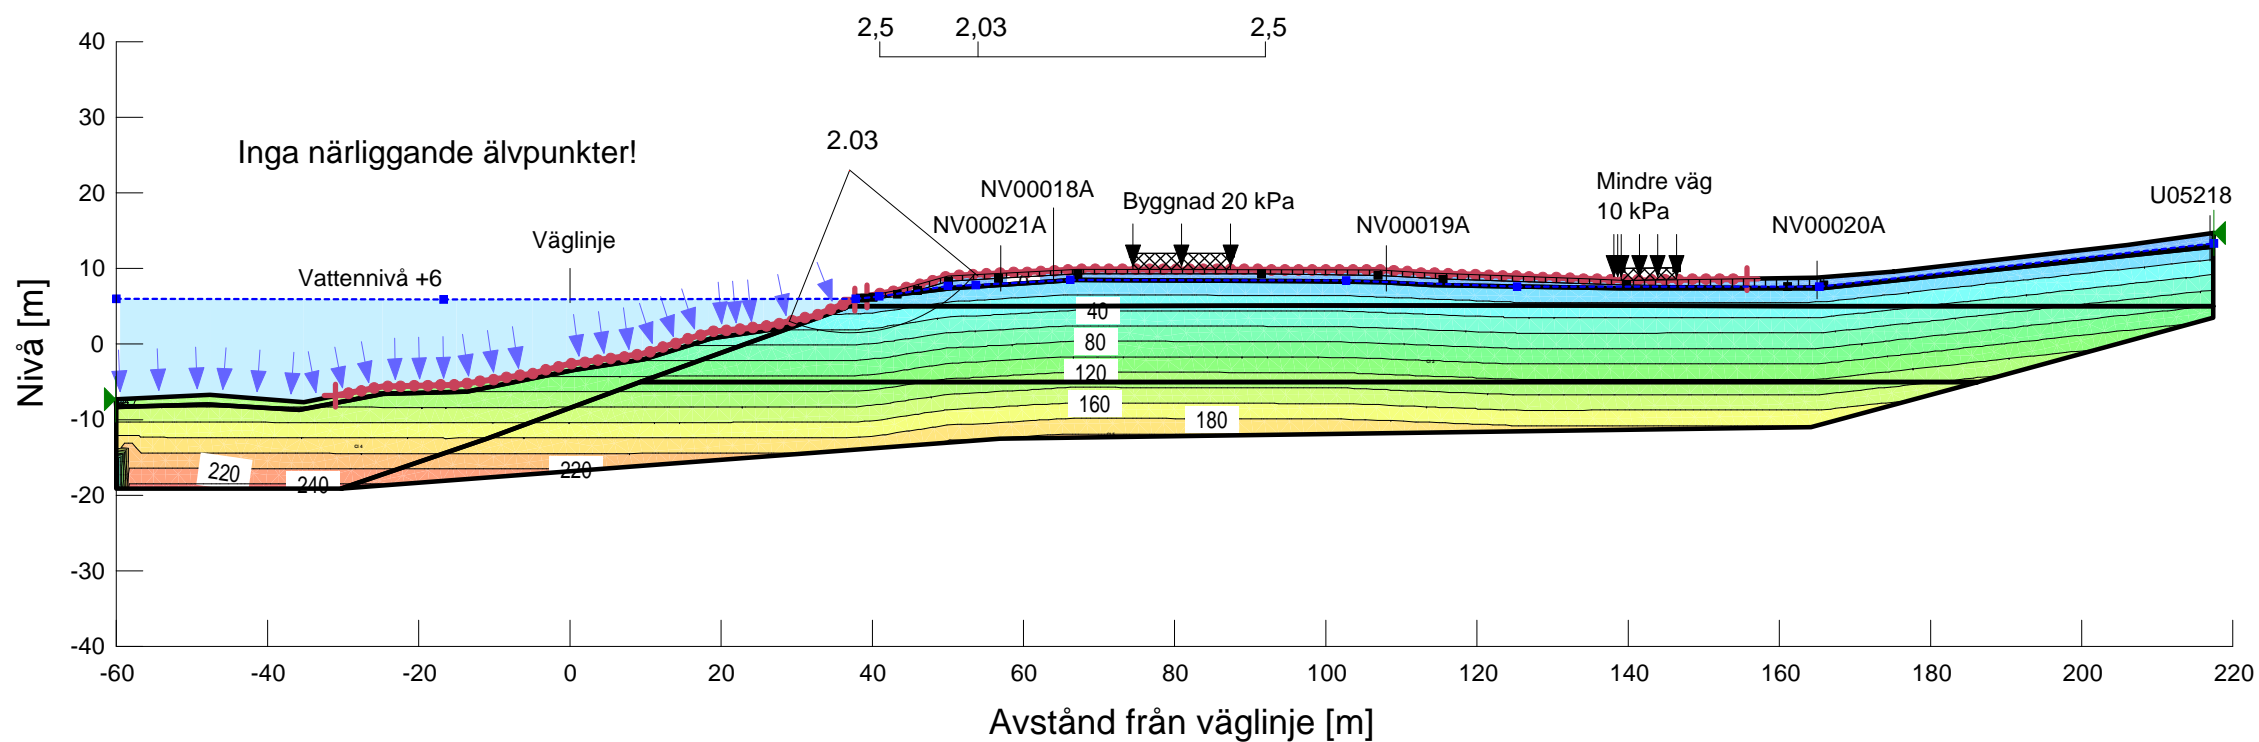

Skala 1:1000 (A3)

Name: CI 1
 Model: Combined, $S=f(\text{datum})$
 Unit Weight: 17.8 kN/m³
 Phi: 30 °
 C-Datum: 0 kPa
 C-Rate of Change: 0 kPa/m
 Cu-Datum: 25 kPa
 Cu-Rate of Change: 0 kPa/m
 C/Cu Ratio: 0.1

Name: CI 2
 Model: Combined, $S=f(\text{datum})$
 Unit Weight: 17.2 kN/m³
 Phi: 30 °
 C-Datum: 0 kPa
 C-Rate of Change: 0 kPa/m
 Cu-Datum: 25 kPa
 Cu-Rate of Change: 3.1 kPa/m
 C/Cu Ratio: 0.1

Name: CI 3
 Model: Combined, $S=f(\text{depth})$
 Unit Weight: 16.4 kN/m³
 Phi: 30 °
 C-Top of Layer: 0 kPa
 C-Rate of Change: 0 kPa/m
 Cu-Top of Layer: 3 kPa
 Cu-Rate of Change: 0 kPa/m
 C/Cu Ratio: 0.1

Name: CI 4
 Model: Combined, $S=f(\text{depth})$
 Unit Weight: 16.4 kN/m³
 Phi: 30 °
 C-Top of Layer: 0 kPa
 C-Rate of Change: 0 kPa/m
 Cu-Top of Layer: 3 kPa
 Cu-Rate of Change: 5.33 kPa/m
 C/Cu Ratio: 0.1

Name: Crust
 Model: Mohr-Coulomb
 Unit Weight: 18 kN/m³
 Cohesion: 30 kPa
 Phi: 0 °

Name: CI 5
 Model: Combined, $S=f(\text{datum})$
 Unit Weight: 17.8 kN/m³
 Phi: 30 °
 C-Datum: 0 kPa
 C-Rate of Change: 0 kPa/m
 Cu-Datum: 53 kPa
 Cu-Rate of Change: 2 kPa/m
 C/Cu Ratio: 0.1