

# SLOPE/W Analysis

Report generated using GeoStudio 2007, version 7.17. Copyright © 1991-2010 GEO-SLOPE International Ltd.

## File Information

Created By: [Kine Meijer](#)  
Revision Number: [138](#)  
Last Edited By: [Kine Meijer](#)  
Date: [2011-07-10](#)  
Time: [23:38:44](#)  
File Name: [V15620\\_odraineradEE\\_älvpunkter.gsz](#)  
Directory: [P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V15620\Beräkningar\110708\](#)  
Last Solved Date: [2011-07-10](#)  
Last Solved Time: [23:39:41](#)

## Project Settings

Length(L) Units: [meters](#)  
Time(t) Units: [Seconds](#)  
Force(F) Units: [kN](#)  
Pressure(p) Units: [kPa](#)  
Strength Units: [kPa](#)  
Unit Weight of Water: [9.807 kN/m<sup>3</sup>](#)  
View: [2D](#)

## Analysis Settings

### SLOPE/W Analysis

Kind: [SLOPE/W](#)  
Method: [Morgenstern-Price](#)  
Settings  
Apply Phreatic Correction: [No](#)  
Side Function  
Interslice force function option: [Half-Sine](#)  
PWP Conditions Source: [Piezometric Line](#)  
Use Staged Rapid Drawdown: [No](#)  
Slip Surface  
Direction of movement: [Right to Left](#)  
Use Passive Mode: [No](#)  
Slip Surface Option: [Entry and Exit](#)  
Critical slip surfaces saved: [5](#)  
Optimize Critical Slip Surface Location: [Yes](#)  
Tension Crack

Tension Crack Option: Tension Crack Line

Percentage Wet: 0.5

Tension Crack Fluid Unit Weight: 9.807 kN/m<sup>3</sup>

FOS Distribution

FOS Calculation Option: Constant

Advanced

Number of Slices: 30

Optimization Tolerance: 0.01

Minimum Slip Surface Depth: 5 m

Optimization Maximum Iterations: 2000

Optimization Convergence Tolerance: 1e-007

Starting Optimization Points: 8

Ending Optimization Points: 16

Complete Passes per Insertion: 1

Driving Side Maximum Convex Angle: 5 °

Resisting Side Maximum Convex Angle: 1 °

## Materials

### CI 1

Model:  $S=f(\text{datum})$

Unit Weight: 16.4 kN/m<sup>3</sup>

C-Datum: 25 kPa

C-Rate of Change: 0 kPa/m

Limiting C: 25 kPa

Elevation: 10 m

Pore Water Pressure

Piezometric Line: 1

### CI 2

Model:  $S=f(\text{datum})$

Unit Weight: 16.4 kN/m<sup>3</sup>

C-Datum: 25 kPa

C-Rate of Change: 2.94 kPa/m

Limiting C: 75 kPa

Elevation: 5 m

Pore Water Pressure

Piezometric Line: 1

### CI 3

Model:  $S=f(\text{depth})$

Unit Weight: 16.4 kN/m<sup>3</sup>

C-Top of Layer: 3 kPa

C-Rate of Change: 22 kPa/m

Limiting C: 25 kPa

Pore Water Pressure

Piezometric Line: 1

#### CI 4

Model:  $S=f(\text{depth})$

Unit Weight: 16.4 kN/m<sup>3</sup>

C-Top of Layer: 25 kPa

C-Rate of Change: 2.63 kPa/m

Limiting C: 70 kPa

Pore Water Pressure

Piezometric Line: 1

#### Crust

Model: Mohr-Coulomb

Unit Weight: 18 kN/m<sup>3</sup>

Cohesion: 3 kPa

Phi: 30 °

Phi-B: 0 °

Pore Water Pressure

Piezometric Line: 1

#### CI 7

Model:  $S=f(\text{datum})$

Unit Weight: 17.1 kN/m<sup>3</sup>

C-Datum: 39.7 kPa


C-Rate of Change: 2.94 kPa/m

Limiting C: 0 kPa


Elevation: 0 m

Pore Water Pressure

Piezometric Line: 1

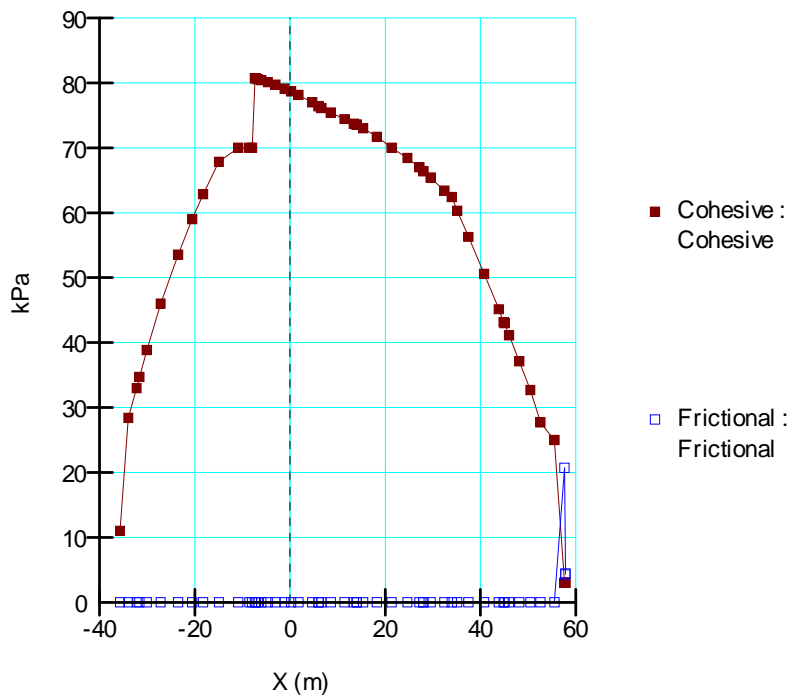

Figur 1 Kohesion och friktion.

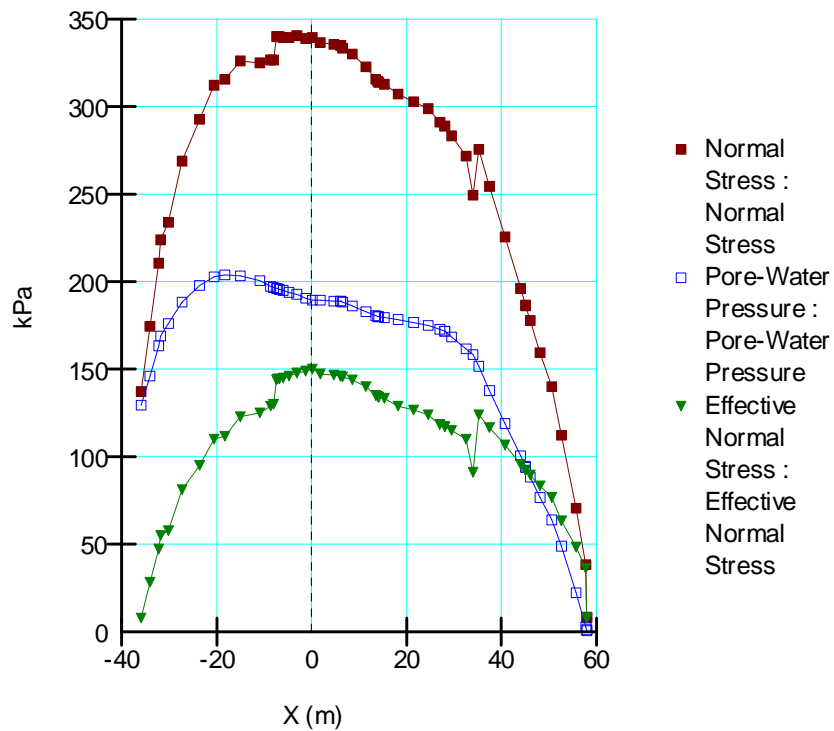


Figur 2 Totalspänning, portryck och effektivspänning.



# KLIMATANPASSNING SKREDFÖRUTSÄTTNINGAR I GÖTA ÄLVDALLEN

Sektion: V15620  
 Delområde: Intagan - Ström  
 Analysmetod: Odränerad analys

Slip Surface Option: Entry and Exit  
 Method: Morgenstern-Price  
 PWP Conditions Source: Piezometric Line  
 Date: 2011-07-10  
 Created By: Kine Meijer  
 Last Edited By: Kine Meijer

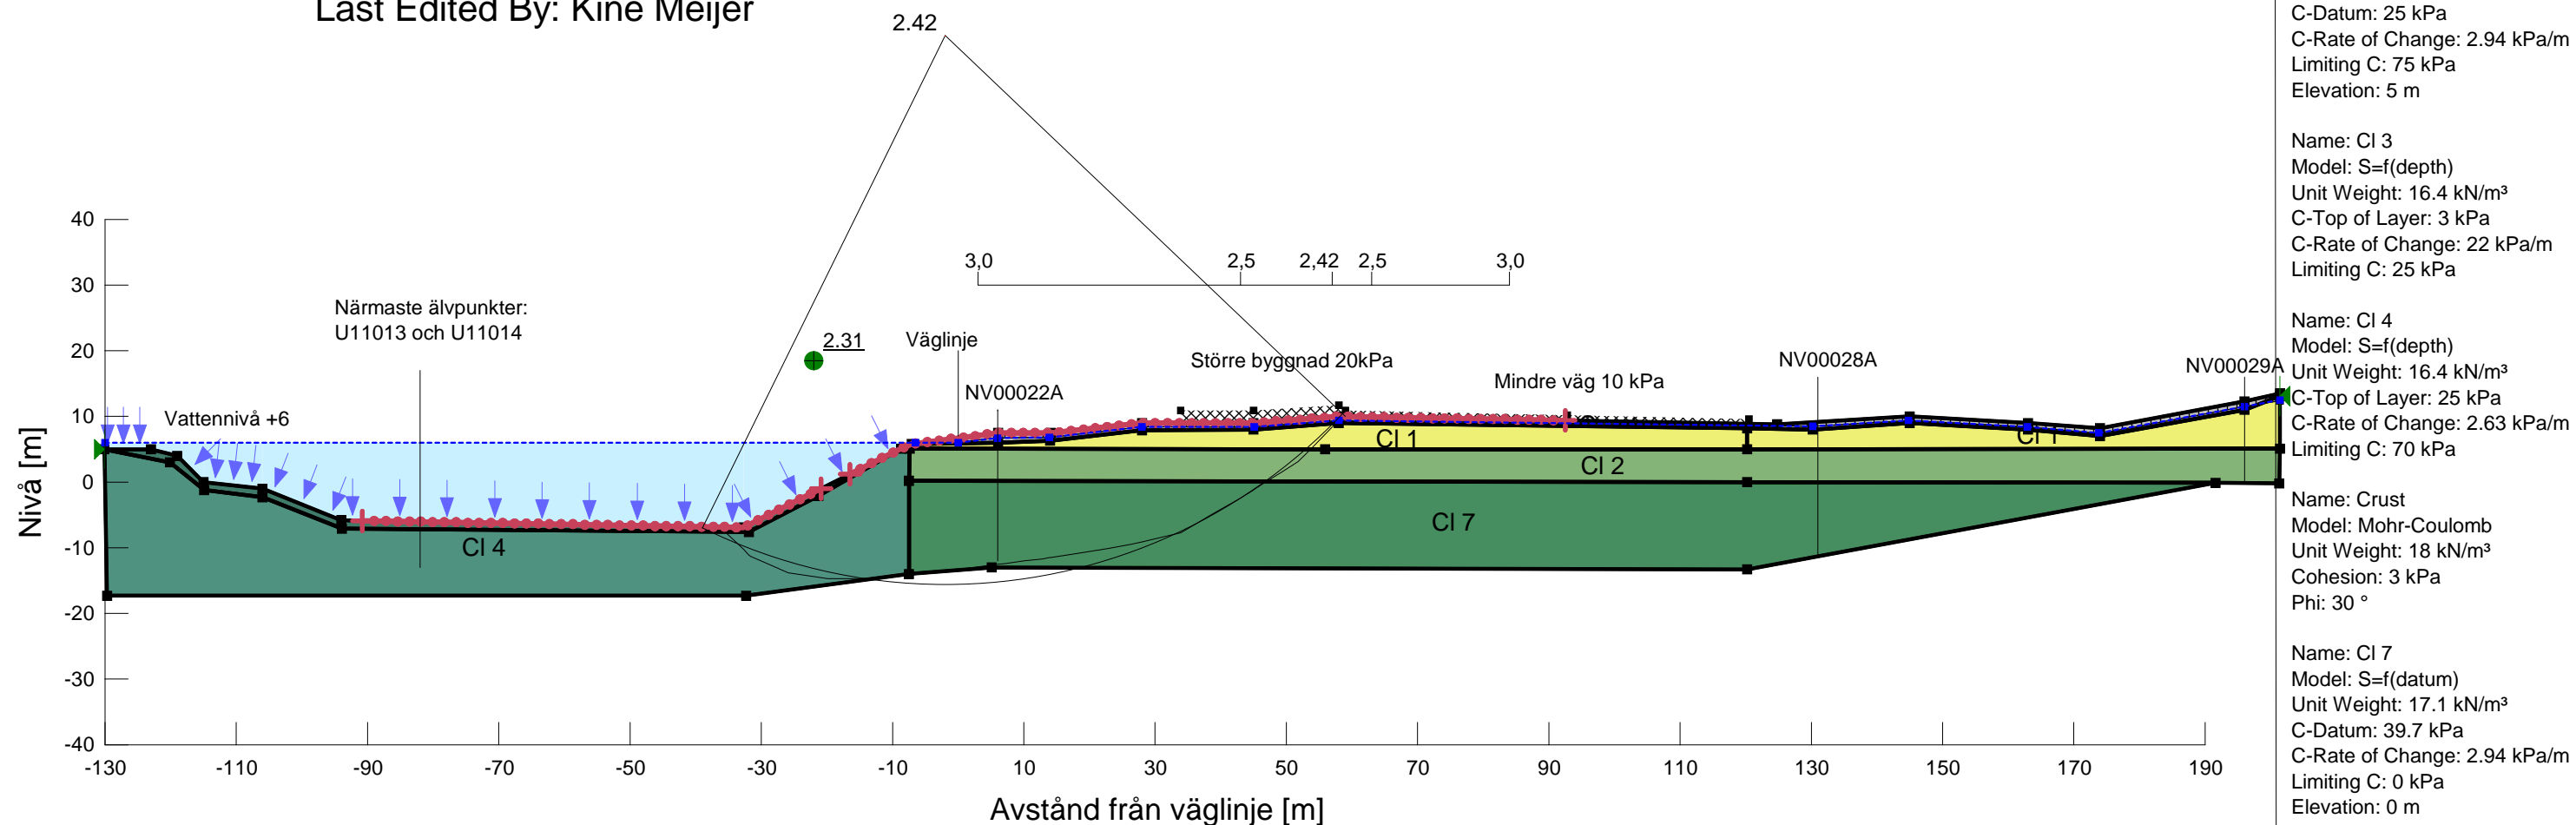

Skala 1:1000 (A3)

Name: CI 1  
 Model:  $S=f(\text{datum})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 C-Datum: 25 kPa  
 C-Rate of Change: 0 kPa/m  
 Limiting C: 25 kPa  
 Elevation: 10 m

Name: CI 2  
 Model:  $S=f(\text{datum})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 C-Datum: 25 kPa  
 C-Rate of Change: 2.94 kPa/m  
 Limiting C: 75 kPa  
 Elevation: 5 m

Name: CI 3  
 Model:  $S=f(\text{depth})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 C-Top of Layer: 3 kPa  
 C-Rate of Change: 22 kPa/m  
 Limiting C: 25 kPa

Name: CI 4  
 Model:  $S=f(\text{depth})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 C-Top of Layer: 25 kPa  
 C-Rate of Change: 2.63 kPa/m  
 Limiting C: 70 kPa

Name: Crust  
 Model: Mohr-Coulomb  
 Unit Weight: 18 kN/m<sup>3</sup>  
 Cohesion: 3 kPa  
 Phi: 30 °

Name: CI 7  
 Model:  $S=f(\text{datum})$   
 Unit Weight: 17.1 kN/m<sup>3</sup>  
 C-Datum: 39.7 kPa  
 C-Rate of Change: 2.94 kPa/m  
 Limiting C: 0 kPa  
 Elevation: 0 m

Directory: P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V15620\Beräkningar\110708\  
 File Name: V15620\_odräneradEE print.gsz

# SLOPE/W Analysis

Report generated using GeoStudio 2007, version 7.17. Copyright © 1991-2010 GEO-SLOPE International Ltd.

## File Information

Created By: [Kine Meijer](#)  
Revision Number: [136](#)  
Last Edited By: [Kine Meijer](#)  
Date: [2011-07-10](#)  
Time: [23:32:46](#)  
File Name: [V15620\\_kombineradEE\\_älvpunkter.gsz](#)  
Directory: [P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V15620\Beräkningar\110708\](#)

## Project Settings

Length(L) Units: [meters](#)  
Time(t) Units: [Seconds](#)  
Force(F) Units: [kN](#)  
Pressure(p) Units: [kPa](#)  
Strength Units: [kPa](#)  
Unit Weight of Water: [9.807 kN/m<sup>3</sup>](#)  
View: [2D](#)

## Analysis Settings

### SLOPE/W Analysis

Kind: [SLOPE/W](#)  
Method: [Morgenstern-Price](#)  
Settings  
    Apply Phreatic Correction: [No](#)  
    Side Function  
        Interslice force function option: [Half-Sine](#)  
    PWP Conditions Source: [Piezometric Line](#)  
    Use Staged Rapid Drawdown: [No](#)  
Slip Surface  
    Direction of movement: [Right to Left](#)  
    Use Passive Mode: [No](#)  
    Slip Surface Option: [Entry and Exit](#)  
    Critical slip surfaces saved: [5](#)  
    Optimize Critical Slip Surface Location: [Yes](#)  
Tension Crack  
    Tension Crack Option: [Tension Crack Line](#)  
    Percentage Wet: [0.5](#)

Tension Crack Fluid Unit Weight: 9.807 kN/m<sup>3</sup>

FOS Distribution

FOS Calculation Option: Constant

Advanced

Number of Slices: 30

Optimization Tolerance: 0.01

Minimum Slip Surface Depth: 5 m

Optimization Maximum Iterations: 2000

Optimization Convergence Tolerance: 1e-007

Starting Optimization Points: 8

Ending Optimization Points: 16

Complete Passes per Insertion: 1

Driving Side Maximum Convex Angle: 5 °

Resisting Side Maximum Convex Angle: 1 °

## Materials

### CI 1

Model: Combined, S=f(datum)

Unit Weight: 16.4 kN/m<sup>3</sup>

Phi: 30 °

C-Datum: 0 kPa

C-Rate of Change: 0 kPa/m

Cu-Datum: 25 kPa

Cu-Rate of Change: 0 kPa/m

C/Cu Ratio: 0.1

Elevation: 10 m

Pore Water Pressure

Piezometric Line: 1

### CI 2

Model: Combined, S=f(datum)

Unit Weight: 16.4 kN/m<sup>3</sup>

Phi: 30 °

C-Datum: 0 kPa

C-Rate of Change: 0 kPa/m

Cu-Datum: 25 kPa

Cu-Rate of Change: 2.94 kPa/m

C/Cu Ratio: 0.1

Elevation: 5 m

Pore Water Pressure

Piezometric Line: 1

### CI 3

Model: Combined, S=f(depth)

Unit Weight: 16.4 kN/m<sup>3</sup>

Phi: 30 °  
C-Top of Layer: 0 kPa  
C-Rate of Change: 0 kPa/m  
Cu-Top of Layer: 3 kPa  
Cu-Rate of Change: 22 kPa/m  
C/Cu Ratio: 0.1  
Pore Water Pressure  
Piezometric Line: 1

#### CI 4

Model: Combined,  $S=f(\text{depth})$   
Unit Weight: 16.4 kN/m<sup>3</sup>  
Phi: 30 °  
C-Top of Layer: 0 kPa  
C-Rate of Change: 0 kPa/m  
Cu-Top of Layer: 25 kPa  
Cu-Rate of Change: 2.63 kPa/m  
C/Cu Ratio: 0.1  
Pore Water Pressure  
Piezometric Line: 1


#### Crust

Model: Mohr-Coulomb  
Unit Weight: 18 kN/m<sup>3</sup>  
Cohesion: 3 kPa  
Phi: 30 °  
Phi-B: 0 °  
Pore Water Pressure  
Piezometric Line: 1


#### CI 7

Model: Combined,  $S=f(\text{datum})$   
Unit Weight: 17.1 kN/m<sup>3</sup>  
Phi: 30 °  
C-Datum: 0 kPa  
C-Rate of Change: 0 kPa/m  
Cu-Datum: 39.7 kPa  
Cu-Rate of Change: 2.94 kPa/m  
C/Cu Ratio: 0.1  
Elevation: 0 m  
Pore Water Pressure  
Piezometric Line: 1



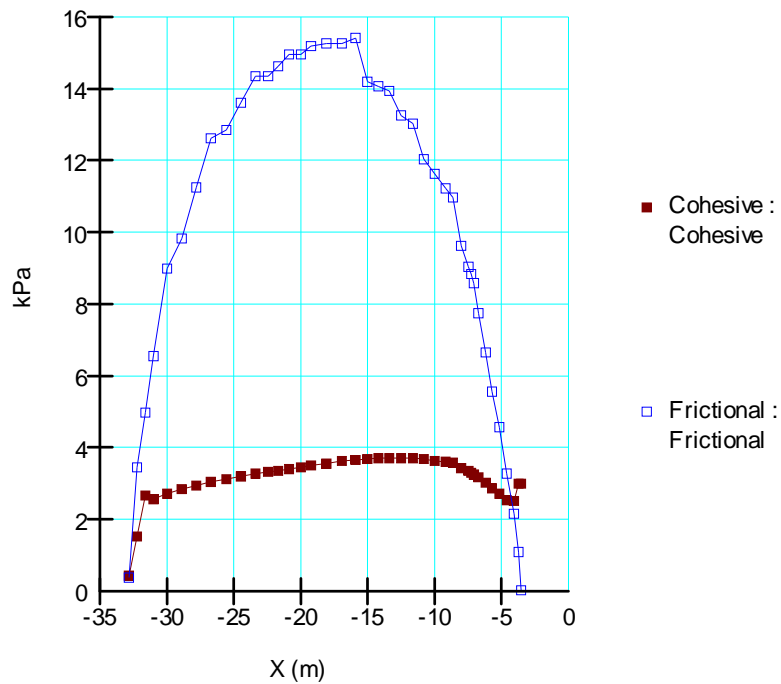

Figur 1 Kohesion och friktion.

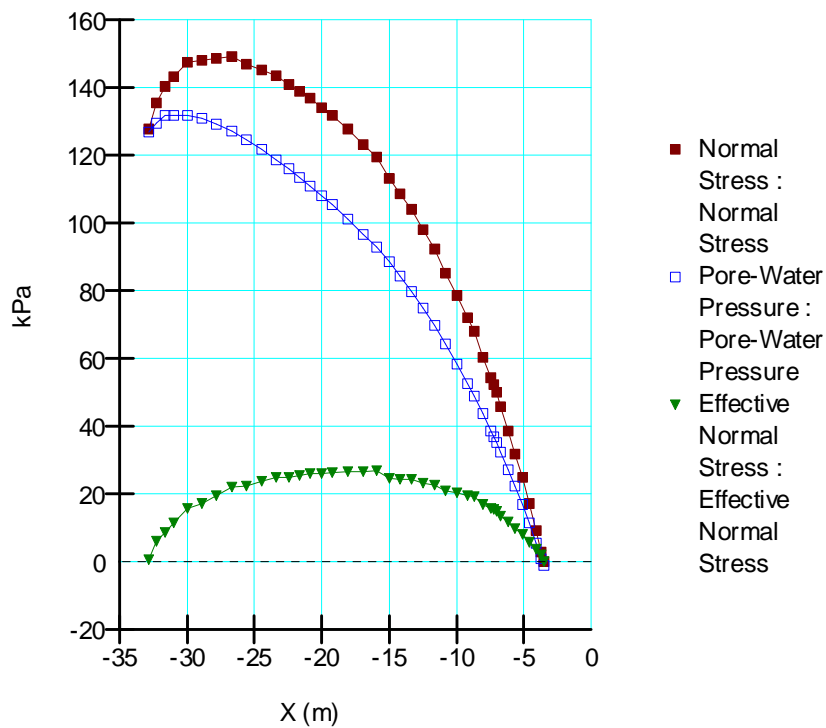

Figur 2 Totalspänning, portryck och effektivspänning.



# KLIMATANPASSNING SKREDFÖRUTSÄTTNINGAR I GÖTA ÄLVDALLEN

Sektion: V15620  
 Delområde: Intagan - Ström  
 Analysmetod: Kombinerad analys

Slip Surface Option: Entry and Exit  
 Method: Morgenstern-Price  
 PWP Conditions Source: Piezometric Line  
 Date: 2011-07-10  
 Created By: Kine Meijer  
 Last Edited By: Kine Meijer

Skala 1:1000 (A3)

Name: CI 1  
 Model: Combined,  $S=f(\text{datum})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Datum: 25 kPa  
 Cu-Rate of Change: 0 kPa/m  
 C/Cu Ratio: 0.1


Name: CI 2  
 Model: Combined,  $S=f(\text{datum})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Datum: 25 kPa  
 Cu-Rate of Change: 2.94 kPa/m  
 C/Cu Ratio: 0.1

Name: CI 3  
 Model: Combined,  $S=f(\text{depth})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Top of Layer: 3 kPa  
 Cu-Rate of Change: 22 kPa/m  
 C/Cu Ratio: 0.1

Name: CI 4  
 Model: Combined,  $S=f(\text{depth})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Top of Layer: 25 kPa  
 Cu-Rate of Change: 2.63 kPa/m  
 C/Cu Ratio: 0.1

Name: Crust  
 Model: Mohr-Coulomb  
 Unit Weight: 18 kN/m<sup>3</sup>  
 Cohesion: 3 kPa  
 Phi: 30 °

Name: CI 7  
 Model: Combined,  $S=f(\text{datum})$   
 Unit Weight: 17.1 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Datum: 39.7 kPa  
 Cu-Rate of Change: 2.94 kPa/m  
 C/Cu Ratio: 0.1

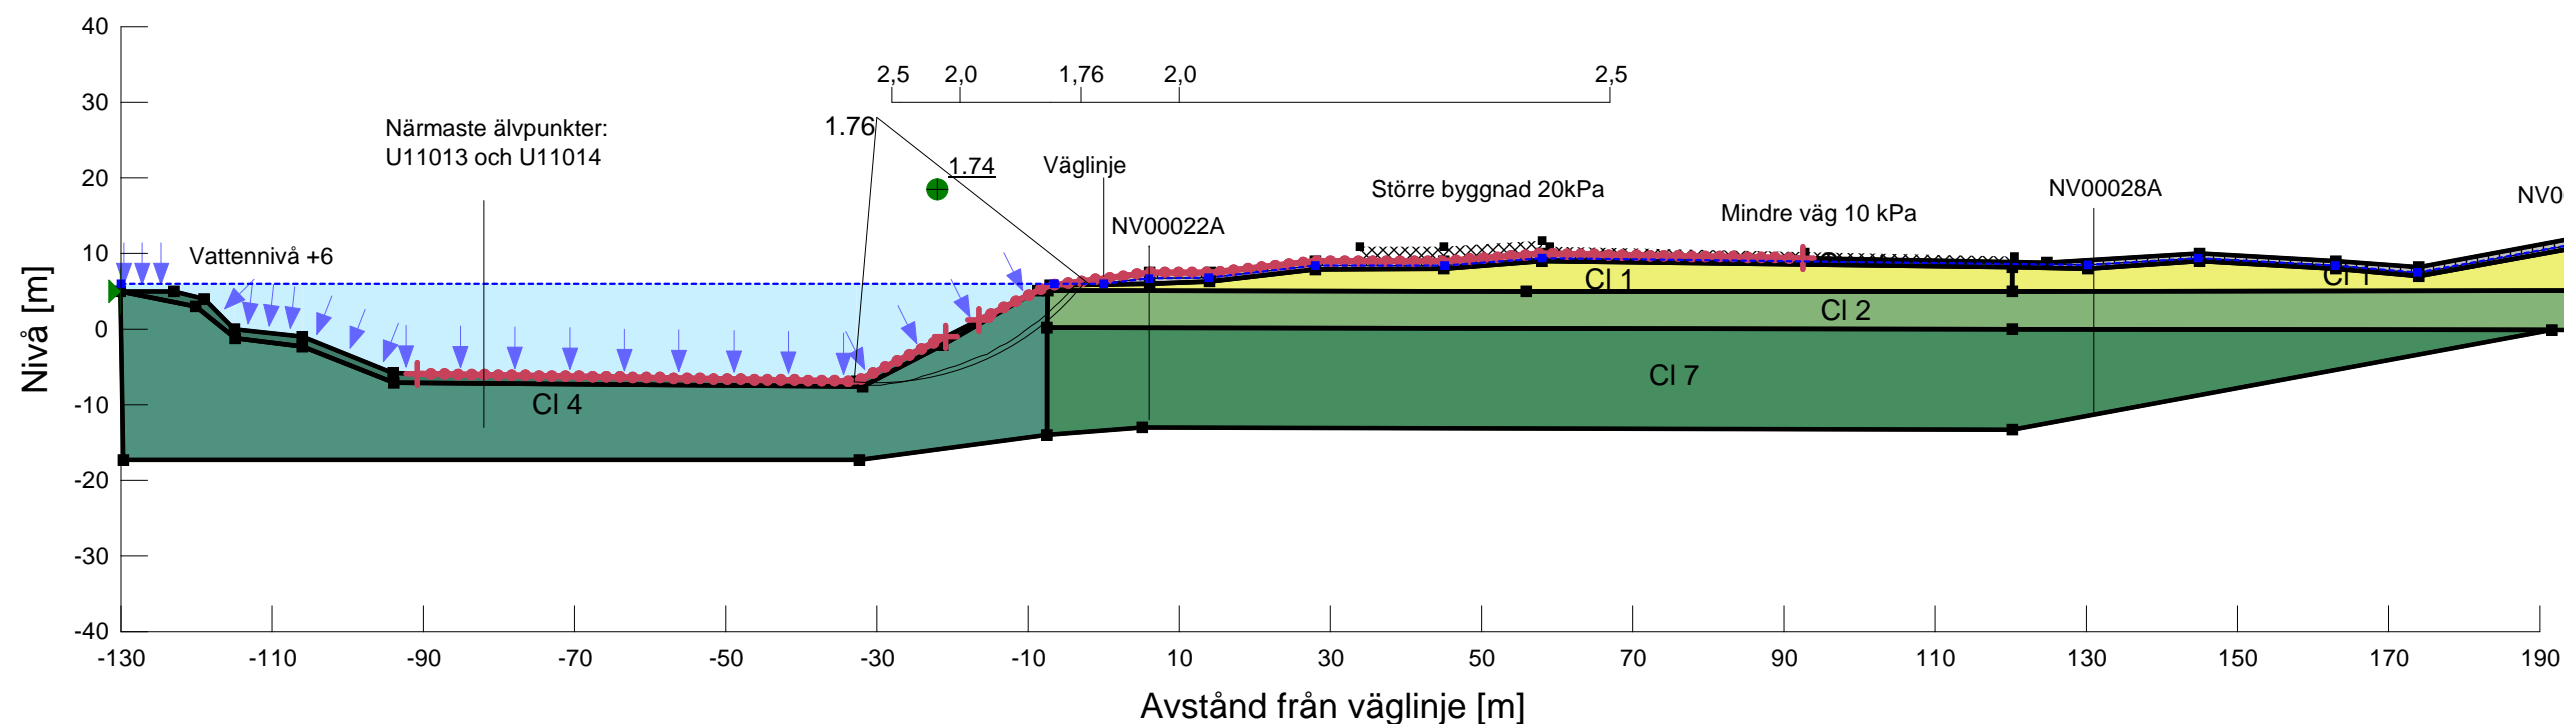

Directory: P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V15620\Beräkningar\110708\  
 File Name: V15620\_kombineradEEprint.gsz



# KLIMATANPASSNING SKREDFÖRUTSÄTTNINGAR I GÖTA ÄLVDALLEN

Sektion: V15620  
 Delområde: Intagan - Ström  
 Analysmetod: Kombinerad analys

Slip Surface Option: Entry and Exit  
 Method: Morgenstern-Price  
 PWP Conditions Source: Piezometric Line  
 Date: 2011-08-16  
 Created By: Kine Meijer  
 Last Edited By: Kine Meijer

Skala 1:1000 (A3)

Name: CI 1  
 Model: Combined,  $S=f(\text{datum})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Datum: 25 kPa  
 Cu-Rate of Change: 0 kPa/m  
 C/Cu Ratio: 0.1


Name: CI 2  
 Model: Combined,  $S=f(\text{datum})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Datum: 25 kPa  
 Cu-Rate of Change: 2.94 kPa/m  
 C/Cu Ratio: 0.1

Name: CI 3  
 Model: Combined,  $S=f(\text{depth})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Top of Layer: 3 kPa  
 Cu-Rate of Change: 22 kPa/m  
 C/Cu Ratio: 0.1

Name: CI 4  
 Model: Combined,  $S=f(\text{depth})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Top of Layer: 25 kPa  
 Cu-Rate of Change: 2.63 kPa/m  
 C/Cu Ratio: 0.1

Name: Crust  
 Model: Mohr-Coulomb  
 Unit Weight: 18 kN/m<sup>3</sup>  
 Cohesion: 3 kPa  
 Phi: 30 °

Name: CI 7  
 Model: Combined,  $S=f(\text{datum})$   
 Unit Weight: 17.1 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Datum: 39.7 kPa  
 Cu-Rate of Change: 2.94 kPa/m  
 C/Cu Ratio: 0.1

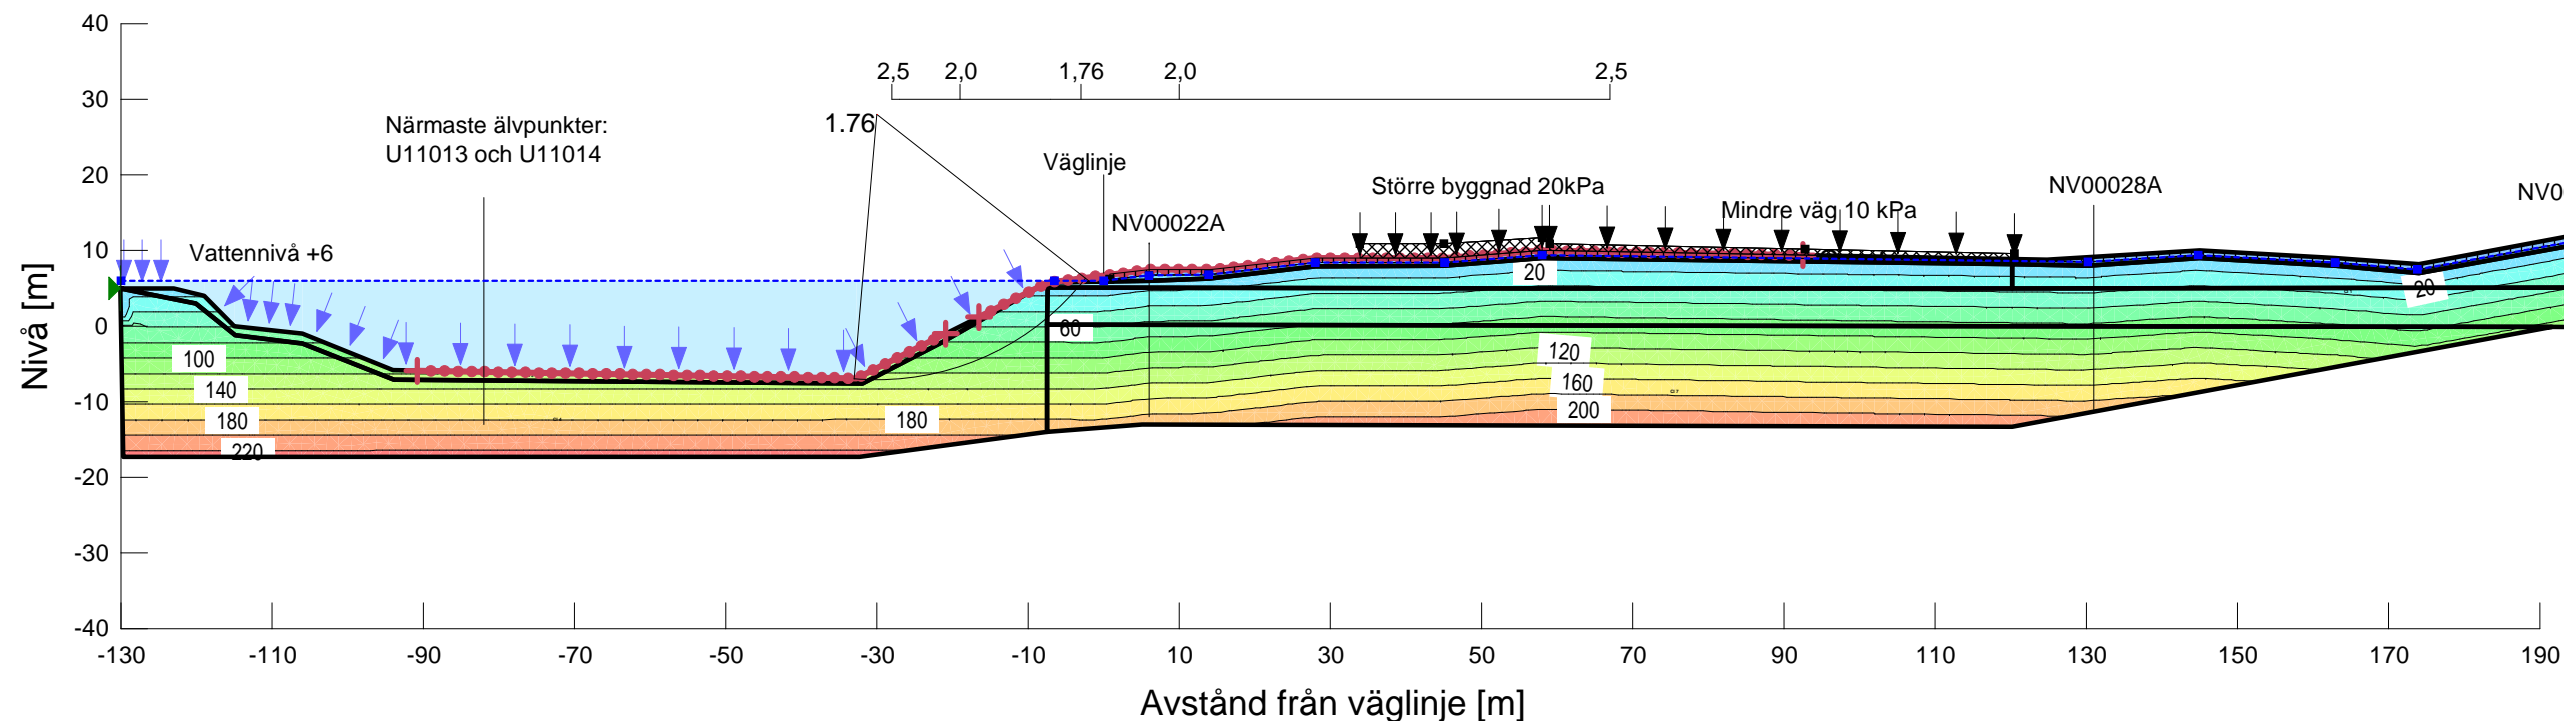

Directory: P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V15620\Beräkningar\110708\  
 File Name: V15620\_kombineradEEprint.gsz