

# Odränerad analys V-H

Report generated using GeoStudio 2007, version 7.17. Copyright © 1991-2010 GEO-SLOPE International Ltd.

## File Information

Created By: [Petter Karlsson](#)  
Revision Number: 27  
Last Edited By: [Kine Meijer](#)  
Date: 2011-08-18  
Time: 09:23:25  
File Name: V18550\_odränerad print.gsz  
Directory: P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V18550\110816\

## Project Settings

Length(L) Units: [meters](#)  
Time(t) Units: [Seconds](#)  
Force(F) Units: [kN](#)  
Pressure(p) Units: [kPa](#)  
Strength Units: [kPa](#)  
Unit Weight of Water: [9.807 kN/m<sup>3</sup>](#)  
View: [2D](#)

## Analysis Settings

### Odränerad analys V-H

Kind: [SLOPE/W](#)  
Method: [Morgenstern-Price](#)  
Settings  
    Apply Phreatic Correction: [No](#)  
    Side Function  
        Interslice force function option: [Half-Sine](#)  
    PWP Conditions Source: [Piezometric Line](#)  
    Use Staged Rapid Drawdown: [No](#)  
Slip Surface  
    Direction of movement: [Left to Right](#)  
    Use Passive Mode: [No](#)  
    Slip Surface Option: [Entry and Exit](#)  
    Critical slip surfaces saved: 5  
    Optimize Critical Slip Surface Location: [Yes](#)  
Tension Crack  
    Tension Crack Option: [Tension Crack Line](#)  
    Percentage Wet: [0.5](#)

Tension Crack Fluid Unit Weight: 9.807 kN/m<sup>3</sup>

FOS Distribution

FOS Calculation Option: Constant

Advanced

Number of Slices: 30

Optimization Tolerance: 0.01

Minimum Slip Surface Depth: 0.1 m

Optimization Maximum Iterations: 2000

Optimization Convergence Tolerance: 1e-007

Starting Optimization Points: 8

Ending Optimization Points: 16

Complete Passes per Insertion: 1

Driving Side Maximum Convex Angle: 5 °

Resisting Side Maximum Convex Angle: 1 °

## Materials

### CI 1

Model:  $S=f(\text{datum})$

Unit Weight: 16.4 kN/m<sup>3</sup>

C-Datum: 28 kPa

C-Rate of Change: 0 kPa/m

Limiting C: 0 kPa

Elevation: 30 m

Pore Water Pressure

Piezometric Line: 1

### CI 2

Model:  $S=f(\text{datum})$

Unit Weight: 16.4 kN/m<sup>3</sup>

C-Datum: 28 kPa

C-Rate of Change: 1.81 kPa/m

Limiting C: 0 kPa

Elevation: 15 m

Pore Water Pressure

Piezometric Line: 1

### CI 3

Model:  $S=f(\text{datum})$

Unit Weight: 17 kN/m<sup>3</sup>

C-Datum: 28 kPa

C-Rate of Change: 1.81 kPa/m

Limiting C: 0 kPa

Elevation: 15 m

Pore Water Pressure

Piezometric Line: 1

**CI 4**


Model:  $S=f(\text{datum})$   
Unit Weight: 16.4 kN/m<sup>3</sup>  
C-Datum: 28 kPa  
C-Rate of Change: 0 kPa/m  
Limiting C: 0 kPa  
Elevation: 15 m  
Pore Water Pressure  
Piezometric Line: 1

**Crust**


Model: Mohr-Coulomb  
Unit Weight: 18 kN/m<sup>3</sup>  
Cohesion: 30 kPa  
Phi: 0 °  
Phi-B: 0 °  
Pore Water Pressure  
Piezometric Line: 1

**CI 5**

Model:  $S=f(\text{datum})$   
Unit Weight: 17 kN/m<sup>3</sup>  
C-Datum: 28 kPa  
C-Rate of Change: 2.1 kPa/m  
Limiting C: 0 kPa  
Elevation: 5 m  
Pore Water Pressure  
Piezometric Line: 1

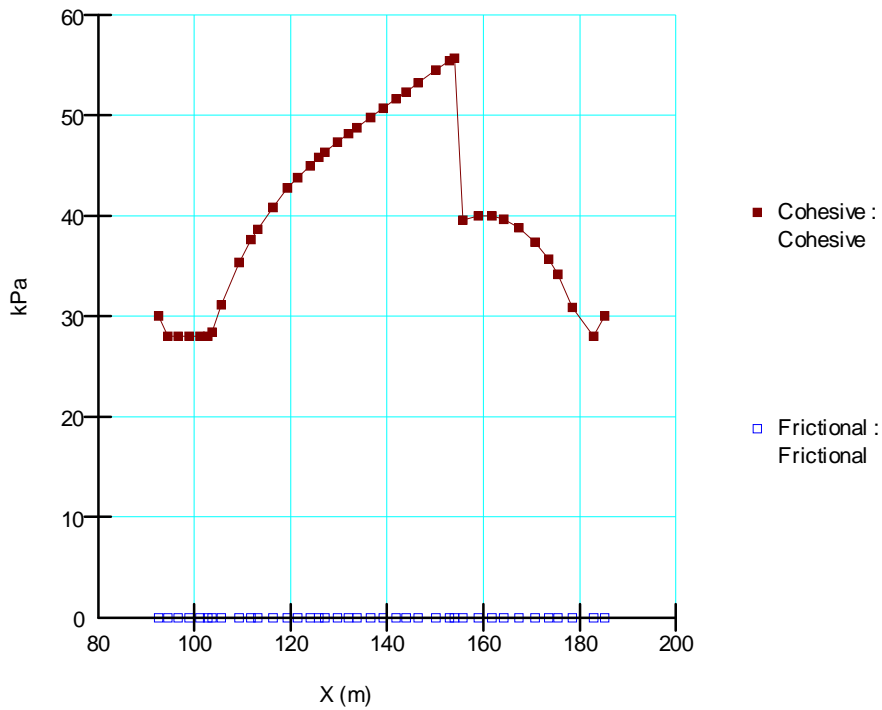

Figur 1. Kohesion och friktion.

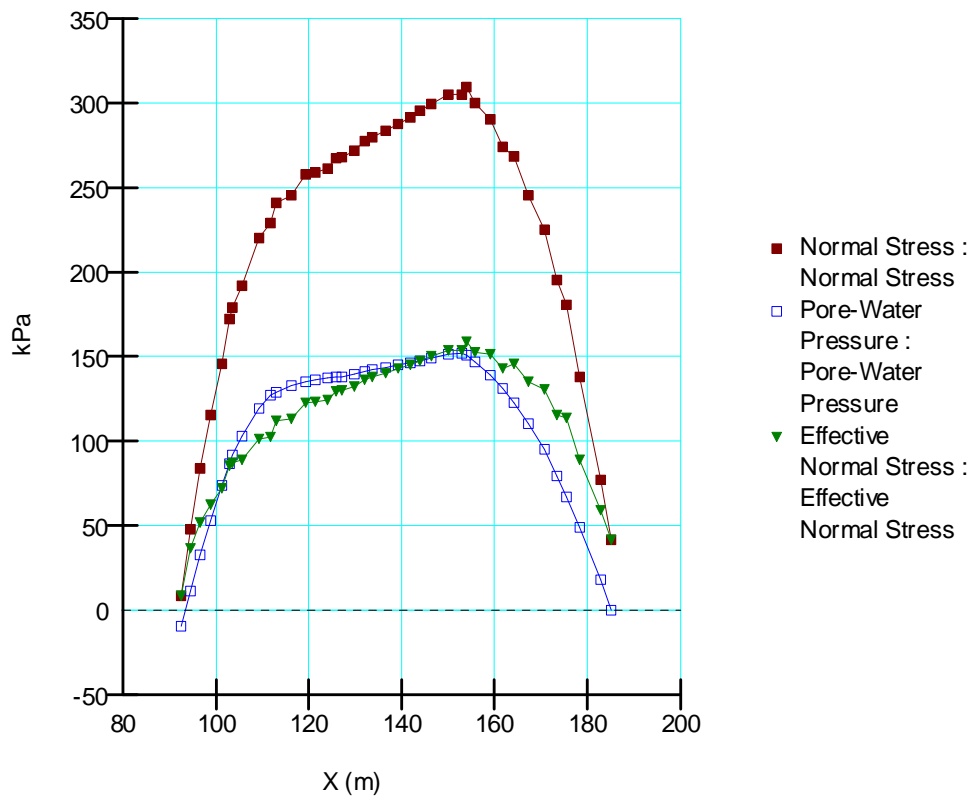

Figur 2. Totalspänning, effektivspänning och portryck.

# Odränerad analys H-V

Report generated using GeoStudio 2007, version 7.17. Copyright © 1991-2010 GEO-SLOPE International Ltd.

## File Information

Created By: [Petter Karlsson](#)  
Revision Number: 15  
Last Edited By: [Rebecca Bertilsson](#)  
Date: 2011-05-09  
Time: 15:17:18  
File Name: V18550\_odränerad print.gsz  
Directory: P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V18550\110816\  
Last Solved Date: 2011-05-09  
Last Solved Time: 15:18:44

## Project Settings

Length(L) Units: [meters](#)  
Time(t) Units: [Seconds](#)  
Force(F) Units: [kN](#)  
Pressure(p) Units: [kPa](#)  
Strength Units: [kPa](#)  
Unit Weight of Water: [9.807 kN/m<sup>3</sup>](#)  
View: [2D](#)

## Analysis Settings

### Odränerad analys H-V

Kind: [SLOPE/W](#)  
Method: [Morgenstern-Price](#)  
Settings  
    Apply Phreatic Correction: [No](#)  
    Side Function  
        Interslice force function option: [Half-Sine](#)  
    PWP Conditions Source: [Piezometric Line](#)  
    Use Staged Rapid Drawdown: [No](#)  
Slip Surface  
    Direction of movement: [Right to Left](#)  
    Use Passive Mode: [No](#)  
    Slip Surface Option: [Entry and Exit](#)  
    Critical slip surfaces saved: 5  
    Optimize Critical Slip Surface Location: [Yes](#)  
    Tension Crack

Tension Crack Option: Tension Crack Line

Percentage Wet: 0.5

Tension Crack Fluid Unit Weight: 9.807 kN/m<sup>3</sup>

FOS Distribution

FOS Calculation Option: Constant

Advanced

Number of Slices: 30

Optimization Tolerance: 0.01

Minimum Slip Surface Depth: 0.1 m

Optimization Maximum Iterations: 2000

Optimization Convergence Tolerance: 1e-007

Starting Optimization Points: 8

Ending Optimization Points: 16

Complete Passes per Insertion: 1

Driving Side Maximum Convex Angle: 5 °

Resisting Side Maximum Convex Angle: 1 °

## Materials

### CI 1

Model:  $S=f(\text{datum})$

Unit Weight: 16.4 kN/m<sup>3</sup>

C-Datum: 28 kPa

C-Rate of Change: 0 kPa/m

Limiting C: 0 kPa

Elevation: 30 m

Pore Water Pressure

Piezometric Line: 1

### CI 2

Model:  $S=f(\text{datum})$

Unit Weight: 16.4 kN/m<sup>3</sup>

C-Datum: 28 kPa

C-Rate of Change: 1.81 kPa/m

Limiting C: 0 kPa

Elevation: 15 m

Pore Water Pressure

Piezometric Line: 1

### CI 3

Model:  $S=f(\text{datum})$

Unit Weight: 17 kN/m<sup>3</sup>

C-Datum: 28 kPa

C-Rate of Change: 1.81 kPa/m

Limiting C: 0 kPa

Elevation: 15 m

Pore Water Pressure  
Piezometric Line: 1

#### CI 4


Model:  $S=f(\text{datum})$   
Unit Weight: 16.4 kN/m<sup>3</sup>  
C-Datum: 28 kPa  
C-Rate of Change: 0 kPa/m  
Limiting C: 0 kPa  
Elevation: 15 m  
Pore Water Pressure  
Piezometric Line: 1

#### Crust


Model: Mohr-Coulomb  
Unit Weight: 18 kN/m<sup>3</sup>  
Cohesion: 30 kPa  
Phi: 0 °  
Phi-B: 0 °  
Pore Water Pressure  
Piezometric Line: 1

#### CI 5

Model:  $S=f(\text{datum})$   
Unit Weight: 17 kN/m<sup>3</sup>  
C-Datum: 28 kPa  
C-Rate of Change: 2.1 kPa/m  
Limiting C: 0 kPa  
Elevation: 5 m  
Pore Water Pressure  
Piezometric Line: 1

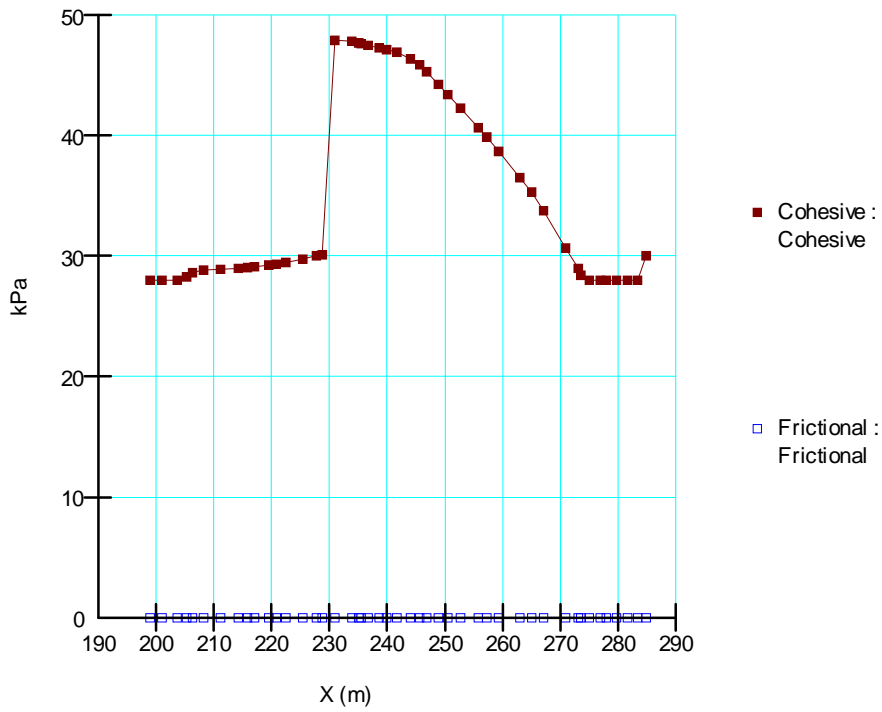

Figur 1. Kohesion och friktion.

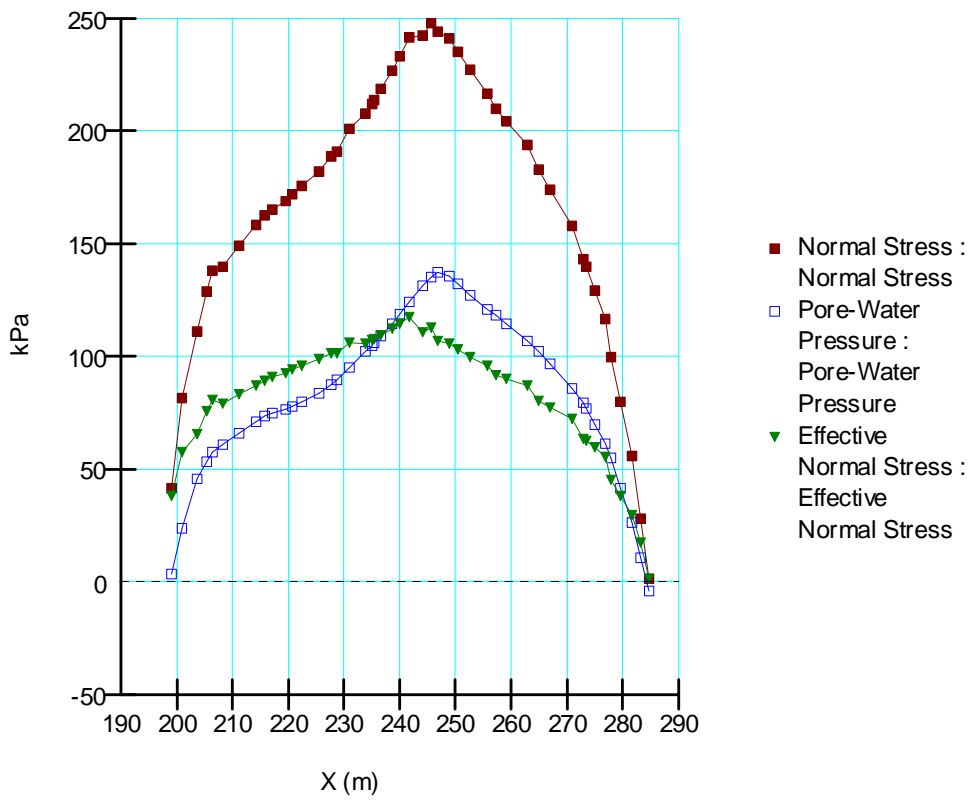

Figur 2. Totalspänning, effektivspänning och portryck.





# KLIMATANPASSNING SKREDFÖRUTSÄTTNINGAR I GÖTA ÄLVDALEN

Sektion: V18550

Delområde: Intagan - Ström

Analysmetod: Odränerad analys

Slip Surface Option: Entry and Exit


Method: Morgenstern-Price

PWP Conditions Source: Piezometric Line

Date: 2011-08-16

Created By: Petter Karlsson

Last Edited By: Kine Meijer

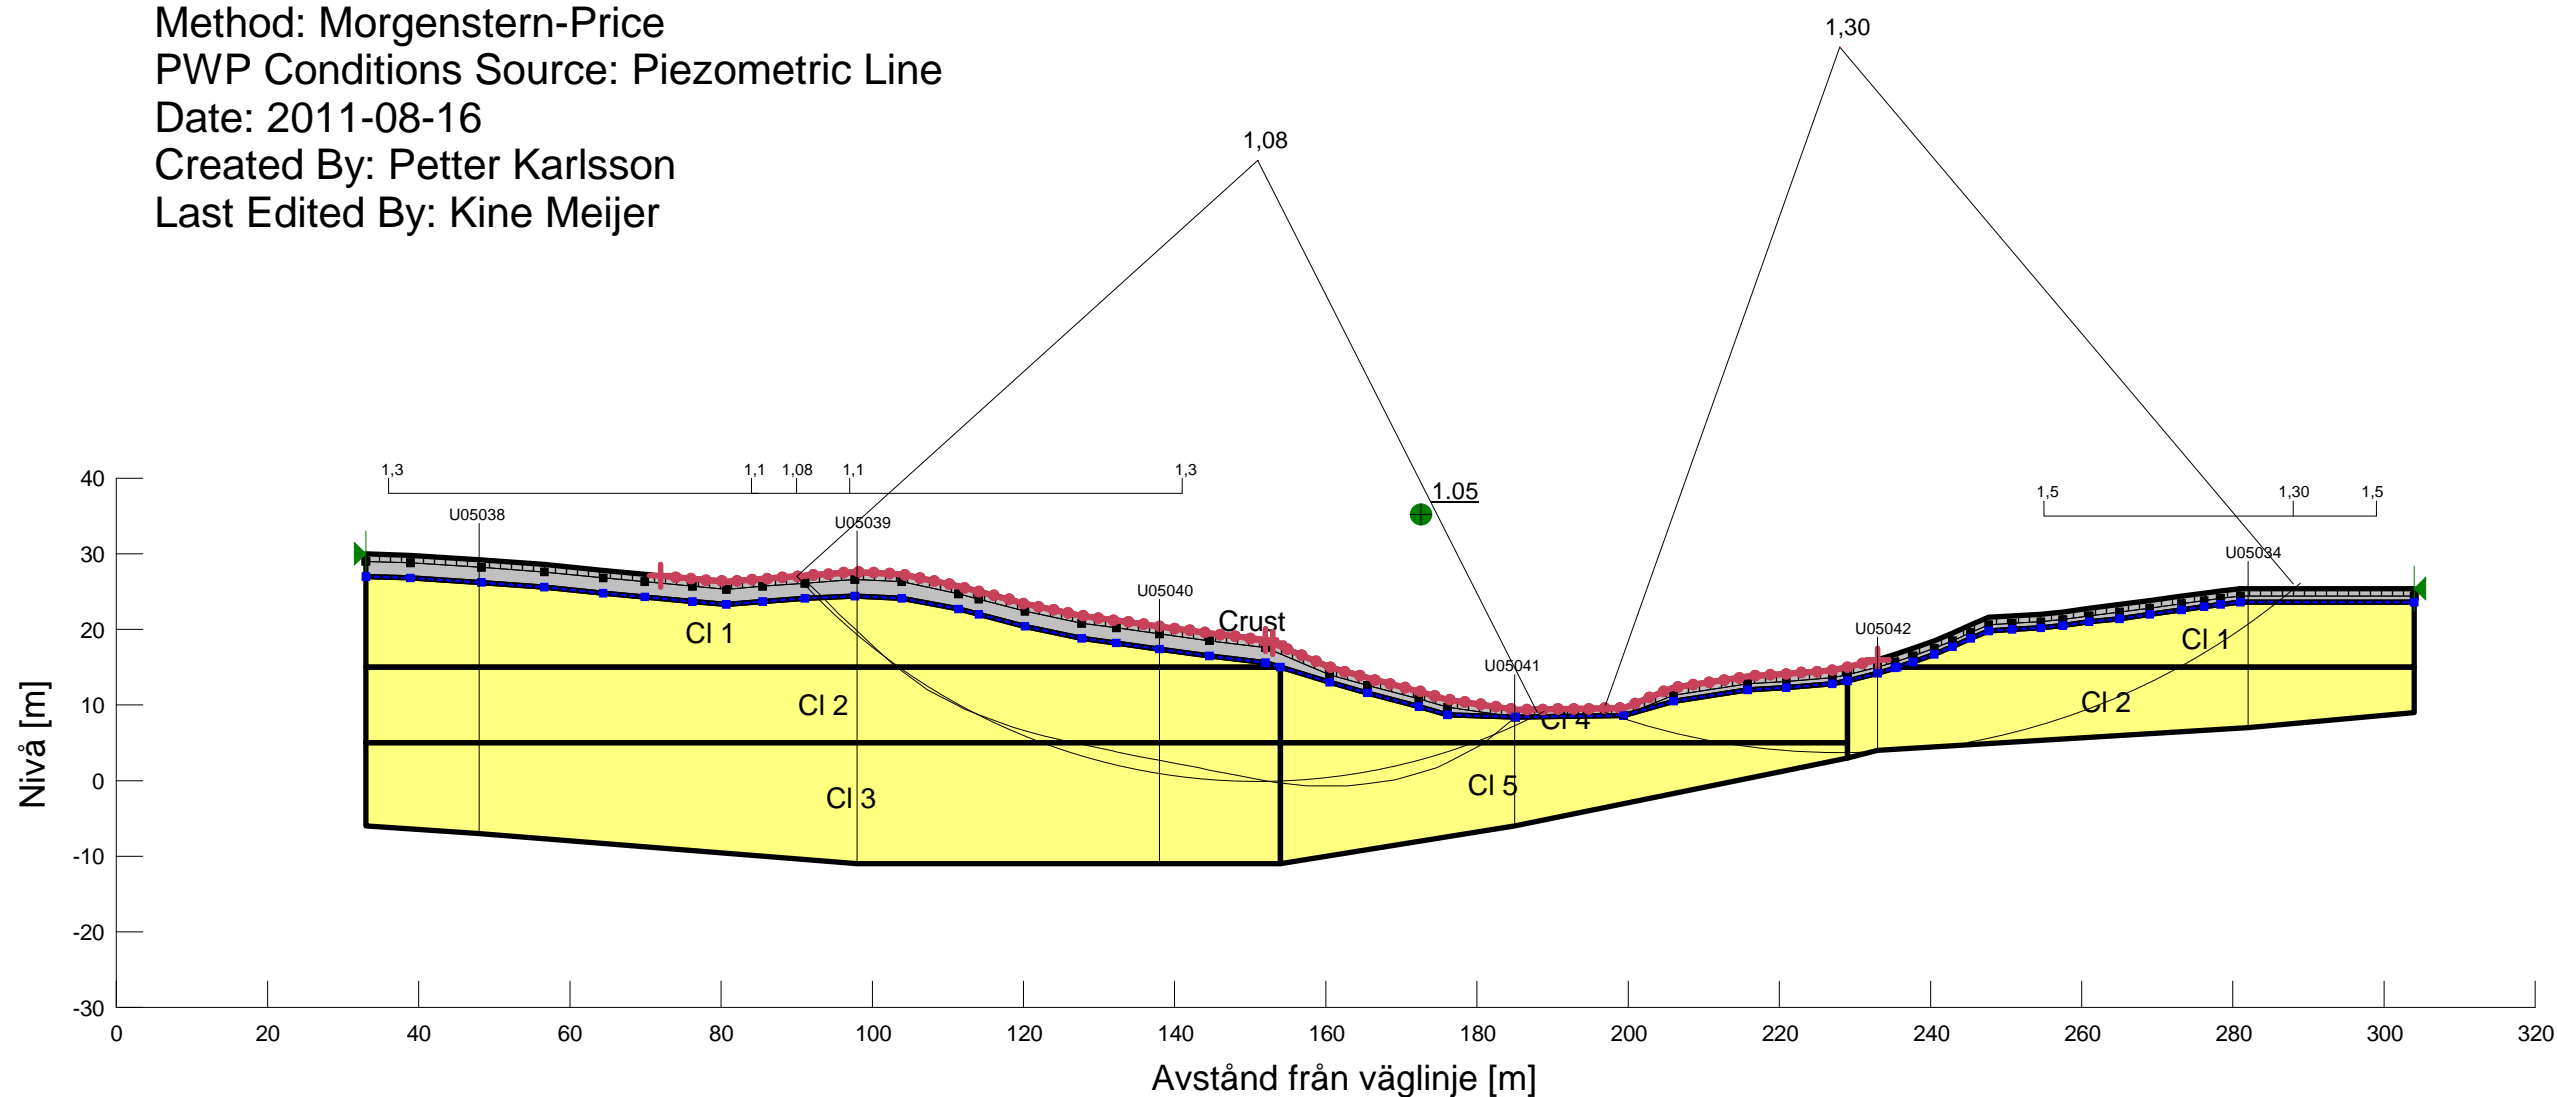

Skala 1:1000 (A3)

Name: Crust  
 Model: Mohr-Coulomb  
 Unit Weight: 18 kN/m<sup>3</sup>  
 Cohesion: 30 kPa  
 Phi: 0 °

Name: CI 1  
 Model: S=f(datum)  
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 C-Datum: 28 kPa  
 C-Rate of Change: 0 kPa/m  
 Elevation: 30 m

Name: CI 2  
 Model: S=f(datum)  
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 C-Datum: 28 kPa  
 C-Rate of Change: 1.81 kPa/m  
 Elevation: 15 m

Name: CI 4  
 Model: S=f(datum)  
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 C-Datum: 28 kPa  
 C-Rate of Change: 0 kPa/m  
 Elevation: 15 m

Name: CI 5  
 Model: S=f(datum)  
 Unit Weight: 17 kN/m<sup>3</sup>  
 C-Datum: 28 kPa  
 C-Rate of Change: 2.1 kPa/m  
 Elevation: 5 m

Directory: P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V18550\110816\

File Name: V18550\_odränerad print.gsz

# Kombinerad analys V-H

Report generated using GeoStudio 2007, version 7.17. Copyright © 1991-2010 GEO-SLOPE International Ltd.

## File Information

Created By: [Petter Karlsson](#)  
Revision Number: 50  
Last Edited By: [Kine Meijer](#)  
Date: 2011-08-16  
Time: 13:30:43  
File Name: V18550\_kombinerad print.gsz  
Directory: P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V18550\110816\  
Last Solved Date: 2011-08-16  
Last Solved Time: 13:32:22

## Project Settings

Length(L) Units: [meters](#)  
Time(t) Units: [Seconds](#)  
Force(F) Units: [kN](#)  
Pressure(p) Units: [kPa](#)  
Strength Units: [kPa](#)  
Unit Weight of Water: [9.807 kN/m<sup>3</sup>](#)  
View: [2D](#)

## Analysis Settings

### Kombinerad analys V-H

Kind: [SLOPE/W](#)  
Method: [Morgenstern-Price](#)  
Settings  
    Side Function  
        Interslice force function option: [Half-Sine](#)  
    PWP Conditions Source: [Pressure Head Spatial Function](#)  
    Pressure Head Spatial Fn.: [Nulägesanalys](#)  
Slip Surface  
    Direction of movement: [Left to Right](#)  
    Use Passive Mode: [No](#)  
    Slip Surface Option: [Entry and Exit](#)  
    Critical slip surfaces saved: [5](#)  
    Optimize Critical Slip Surface Location: [Yes](#)  
Tension Crack  
    Tension Crack Option: [Tension Crack Line](#)

Percentage Wet: 0.5

Tension Crack Fluid Unit Weight: 9.807 kN/m<sup>3</sup>

FOS Distribution

FOS Calculation Option: Constant

Advanced

Number of Slices: 30

Optimization Tolerance: 0.01

Minimum Slip Surface Depth: 0.1 m

Optimization Maximum Iterations: 2000

Optimization Convergence Tolerance: 1e-007

Starting Optimization Points: 8

Ending Optimization Points: 16

Complete Passes per Insertion: 1

Driving Side Maximum Convex Angle: 5 °

Resisting Side Maximum Convex Angle: 1 °

## Materials

### CI 1

Model: Combined, S=f(datum)

Unit Weight: 16.4 kN/m<sup>3</sup>

Phi: 30 °

C-Datum: 0 kPa

C-Rate of Change: 0 kPa/m

Cu-Datum: 28 kPa

Cu-Rate of Change: 0 kPa/m

C/Cu Ratio: 0.1

Elevation: 30 m

### CI 2

Model: Combined, S=f(datum)

Unit Weight: 16.4 kN/m<sup>3</sup>

Phi: 30 °

C-Datum: 0 kPa

C-Rate of Change: 0 kPa/m

Cu-Datum: 28 kPa

Cu-Rate of Change: 1.81 kPa/m

C/Cu Ratio: 0.1

Elevation: 15 m

### CI 3

Model: Combined, S=f(datum)

Unit Weight: 17 kN/m<sup>3</sup>

Phi: 30 °

C-Datum: 0 kPa

C-Rate of Change: 0 kPa/m

Cu-Datum: 28 kPa  
Cu-Rate of Change: 1.81 kPa/m  
C/Cu Ratio: 0.1  
Elevation: 15 m

#### CI 4


Model: Combined,  $S=f(\text{datum})$   
Unit Weight: 16.4 kN/m<sup>3</sup>  
Phi: 30 °  
C-Datum: 0 kPa  
C-Rate of Change: 0 kPa/m  
Cu-Datum: 28 kPa  
Cu-Rate of Change: 0 kPa/m  
C/Cu Ratio: 0.1  
Elevation: 15 m

#### Crust


Model: Combined,  $S=f(\text{depth})$   
Unit Weight: 18 kN/m<sup>3</sup>  
Phi: 30 °  
C-Top of Layer: 0 kPa  
C-Rate of Change: 0 kPa/m  
Cu-Top of Layer: 30 kPa  
Cu-Rate of Change: 0 kPa/m  
C/Cu Ratio: 0.1

#### CI 5

Model: Combined,  $S=f(\text{datum})$   
Unit Weight: 17 kN/m<sup>3</sup>  
Phi: 30 °  
C-Datum: 0 kPa  
C-Rate of Change: 0 kPa/m  
Cu-Datum: 28 kPa  
Cu-Rate of Change: 2.1 kPa/m  
C/Cu Ratio: 0.1  
Elevation: 5 m

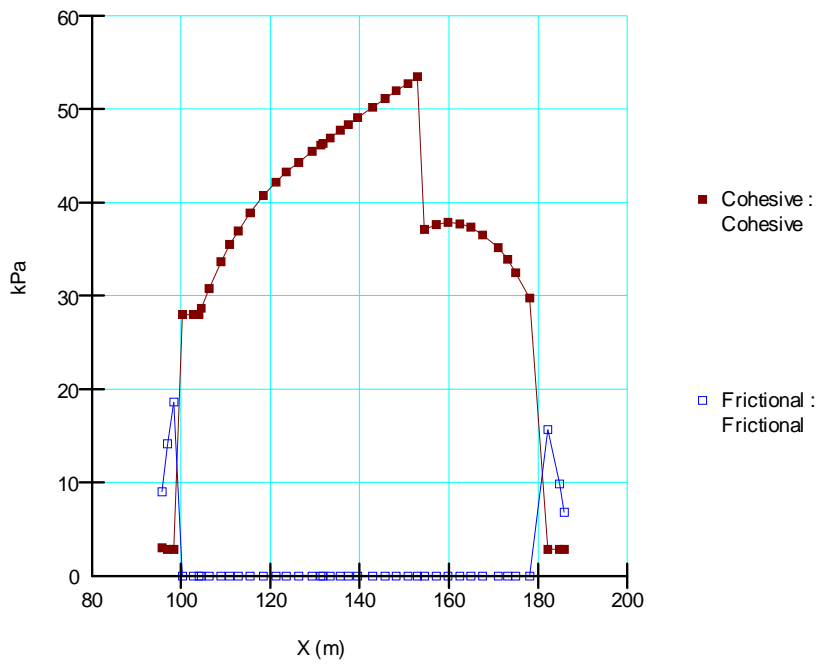

Figur 1. Kohesion och friktion.

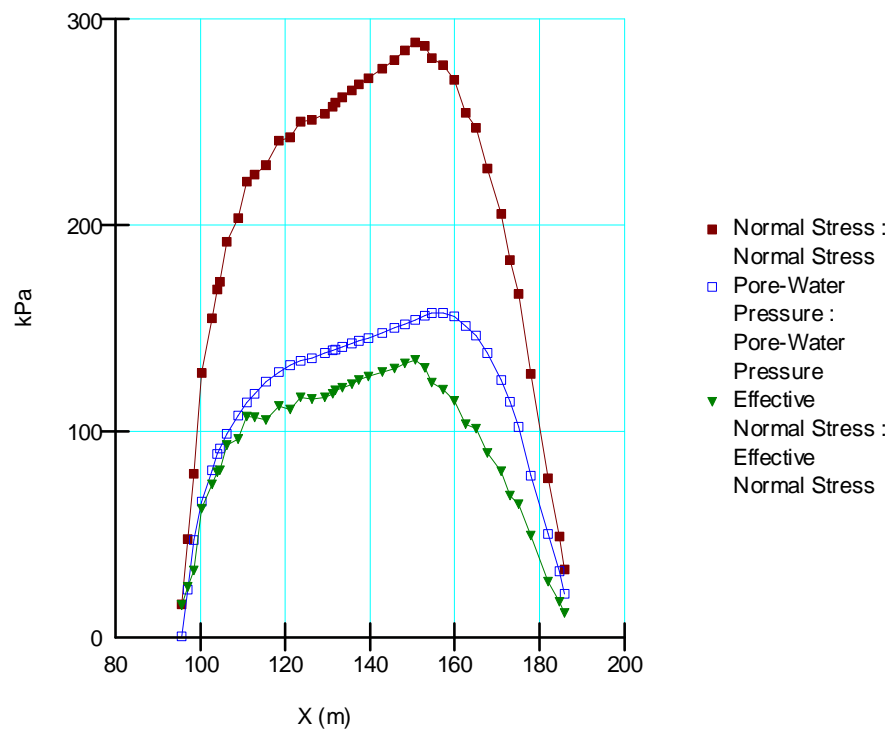

Figur 2. Totalspänning, effektivspänning och portryck.

# Kombinerad analys H-V

Report generated using GeoStudio 2007, version 7.17. Copyright © 1991-2010 GEO-SLOPE International Ltd.

## File Information

Created By: [Petter Karlsson](#)  
Revision Number: 42  
Last Edited By: [Rebecca Bertilsson](#)  
Date: 2011-05-10  
Time: 09:11:28  
File Name: V18550\_kombinerad print.gsz  
Directory: P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V18550\110816\  
Last Solved Date: 2011-05-10  
Last Solved Time: 09:12:08

## Project Settings

Length(L) Units: [meters](#)  
Time(t) Units: [Seconds](#)  
Force(F) Units: [kN](#)  
Pressure(p) Units: [kPa](#)  
Strength Units: [kPa](#)  
Unit Weight of Water: [9.807 kN/m<sup>3</sup>](#)  
View: [2D](#)

## Analysis Settings

### Kombinerad analys H-V

Kind: [SLOPE/W](#)  
Method: [Morgenstern-Price](#)  
Settings  
    Side Function  
        Interslice force function option: [Half-Sine](#)  
    PWP Conditions Source: [Pressure Head Spatial Function](#)  
    Pressure Head Spatial Fn.: [Nulägesanalys](#)  
Slip Surface  
    Direction of movement: [Right to Left](#)  
    Use Passive Mode: [No](#)  
    Slip Surface Option: [Entry and Exit](#)  
    Critical slip surfaces saved: 5  
    Optimize Critical Slip Surface Location: [Yes](#)  
Tension Crack  
    Tension Crack Option: [Tension Crack Line](#)

Percentage Wet: 0.5

Tension Crack Fluid Unit Weight: 9.807 kN/m<sup>3</sup>

FOS Distribution

FOS Calculation Option: Constant

Advanced

Number of Slices: 30

Optimization Tolerance: 0.01

Minimum Slip Surface Depth: 0.1 m

Optimization Maximum Iterations: 2000

Optimization Convergence Tolerance: 1e-007

Starting Optimization Points: 8

Ending Optimization Points: 16

Complete Passes per Insertion: 1

Driving Side Maximum Convex Angle: 5 °

Resisting Side Maximum Convex Angle: 1 °

## Materials

### CI 1

Model: Combined, S=f(datum)

Unit Weight: 16.4 kN/m<sup>3</sup>

Phi: 30 °

C-Datum: 0 kPa

C-Rate of Change: 0 kPa/m

Cu-Datum: 28 kPa

Cu-Rate of Change: 0 kPa/m

C/Cu Ratio: 0.1

Elevation: 30 m

### CI 2

Model: Combined, S=f(datum)

Unit Weight: 16.4 kN/m<sup>3</sup>

Phi: 30 °

C-Datum: 0 kPa

C-Rate of Change: 0 kPa/m

Cu-Datum: 28 kPa

Cu-Rate of Change: 1.81 kPa/m

C/Cu Ratio: 0.1

Elevation: 15 m

### CI 3

Model: Combined, S=f(datum)

Unit Weight: 17 kN/m<sup>3</sup>

Phi: 30 °

C-Datum: 0 kPa

C-Rate of Change: 0 kPa/m

Cu-Datum: 28 kPa  
Cu-Rate of Change: 1.81 kPa/m  
C/Cu Ratio: 0.1  
Elevation: 15 m

#### CI 4

Model: Combined,  $S=f(\text{datum})$   
Unit Weight: 16.4 kN/m<sup>3</sup>  
Phi: 30 °  
C-Datum: 0 kPa  
C-Rate of Change: 0 kPa/m  
Cu-Datum: 28 kPa  
Cu-Rate of Change: 0 kPa/m  
C/Cu Ratio: 0.1  
Elevation: 15 m


#### Crust

Model: Combined,  $S=f(\text{depth})$   
Unit Weight: 18 kN/m<sup>3</sup>  
Phi: 30 °  
C-Top of Layer: 0 kPa  
C-Rate of Change: 0 kPa/m  
Cu-Top of Layer: 30 kPa  
Cu-Rate of Change: 0 kPa/m  
C/Cu Ratio: 0.1


#### CI 5

Model: Combined,  $S=f(\text{datum})$   
Unit Weight: 17 kN/m<sup>3</sup>  
Phi: 30 °  
C-Datum: 0 kPa  
C-Rate of Change: 0 kPa/m  
Cu-Datum: 28 kPa  
Cu-Rate of Change: 2.1 kPa/m  
C/Cu Ratio: 0.1  
Elevation: 5 m



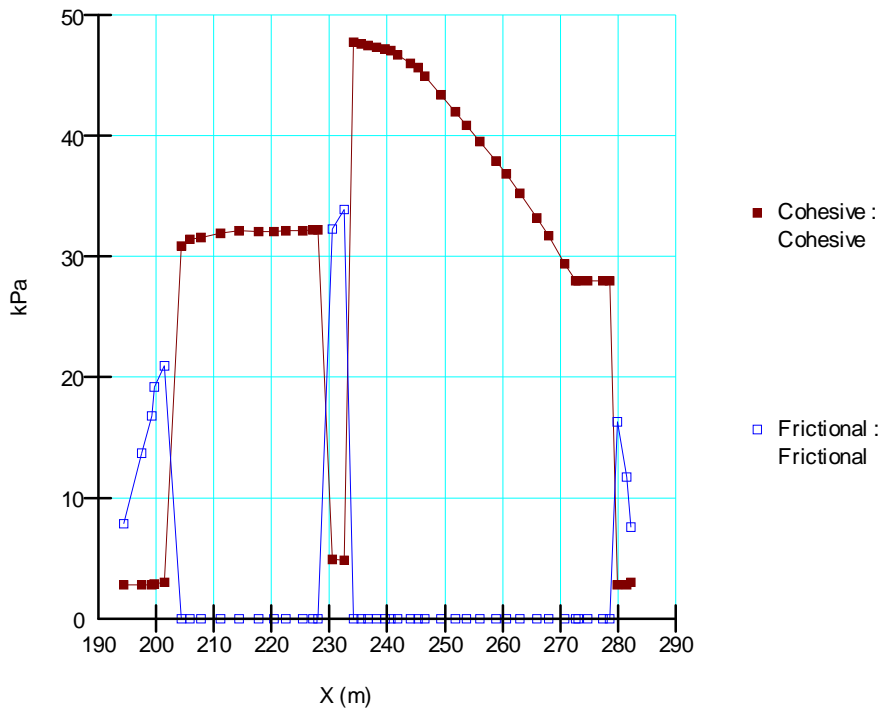

Figur 1. Kohesion och friktion.

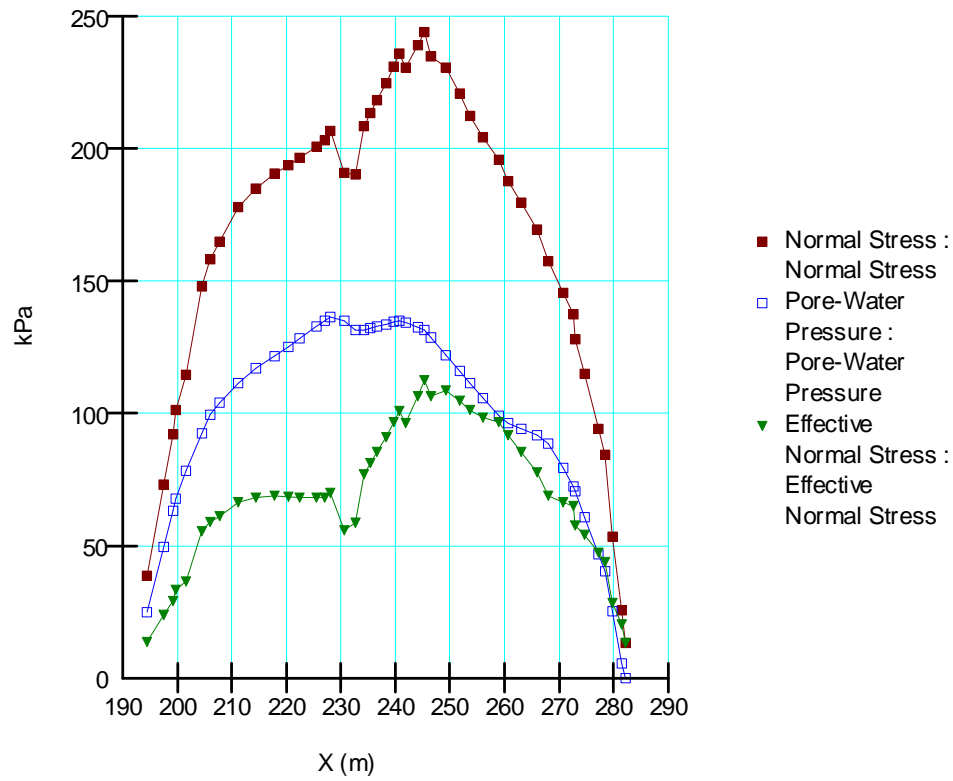

Figur 2. Totalspänning, effektivspänning och portryck.



# KLIMATANPASSNING SKREDFÖRUTSÄTTNINGAR I GÖTA ÄLVDALLEN

Sektion: V18550  
 Delområde: Intagan - Ström  
 Analysmetod: Kombinerad analys

Slip Surface Option: Entry and Exit  
 Method: Morgenstern-Price  
 PWP Conditions Source: Pressure Head Spatial Function  
 Date: 2011-08-16  
 Created By: Petter Karlsson  
 Last Edited By: Kine Meijer

Skala 1:1000 (A3)


Name: Crust  
 Model: Combined,  $S=f(\text{depth})$   
 Unit Weight: 18 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Top of Layer: 30 kPa  
 Cu-Rate of Change: 0 kPa/m  
 C/Cu Ratio: 0.1

Name: CI 1  
 Model: Combined,  $S=f(\text{datum})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Datum: 28 kPa  
 Cu-Rate of Change: 0 kPa/m  
 C/Cu Ratio: 0.1  
 Elevation: 30 m

Name: CI 2  
 Model: Combined,  $S=f(\text{datum})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Datum: 28 kPa  
 Cu-Rate of Change: 1.81 kPa/m  
 C/Cu Ratio: 0.1  
 Elevation: 15 m

Name: CI 4  
 Model: Combined,  $S=f(\text{datum})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Datum: 28 kPa  
 Cu-Rate of Change: 0 kPa/m  
 C/Cu Ratio: 0.1  
 Elevation: 15 m

Name: CI 5  
 Model: Combined,  $S=f(\text{datum})$   
 Unit Weight: 17 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Datum: 28 kPa  
 Cu-Rate of Change: 2.1 kPa/m  
 C/Cu Ratio: 0.1  
 Elevation: 5 m

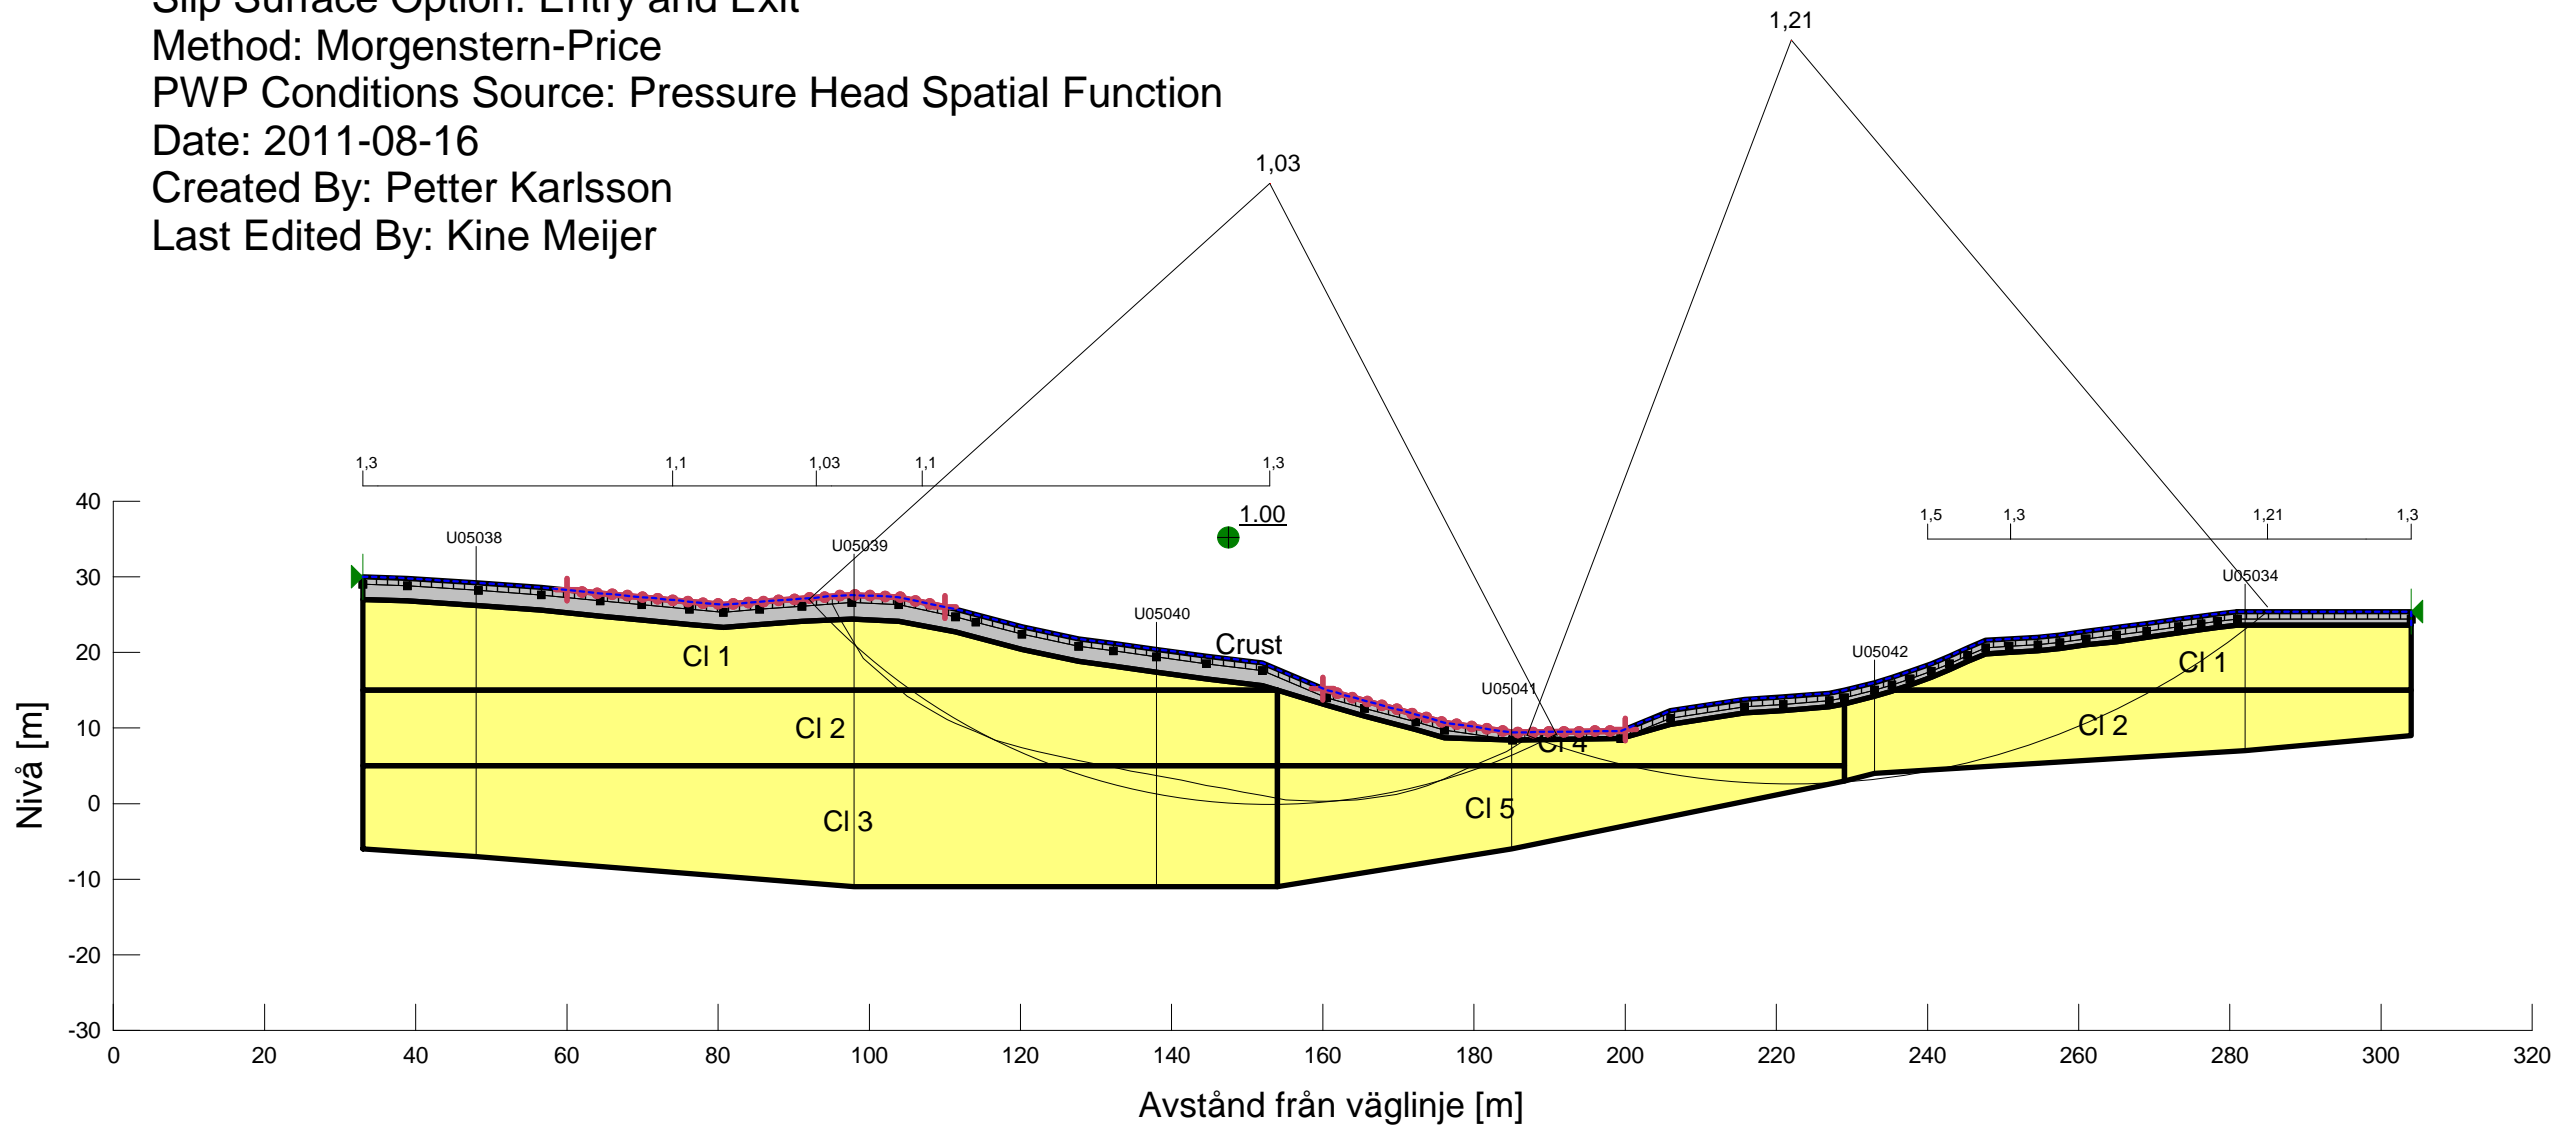

Directory: P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V18550\110816\  
 File Name: V18550\_kombinerad print.gsz



# KLIMATANPASSNING SKREDFÖRUTSÄTTNINGAR I GÖTA ÄLVDALLEN

Sektion: V18550

Delområde: Intagan - Ström

Analysmetod: Kombinerad analys

Slip Surface Option: Entry and Exit


Method: Morgenstern-Price

PWP Conditions Source: Pressure Head Spatial Function

Date: 2011-08-18

Created By: Petter Karlsson

Last Edited By: Kine Meijer

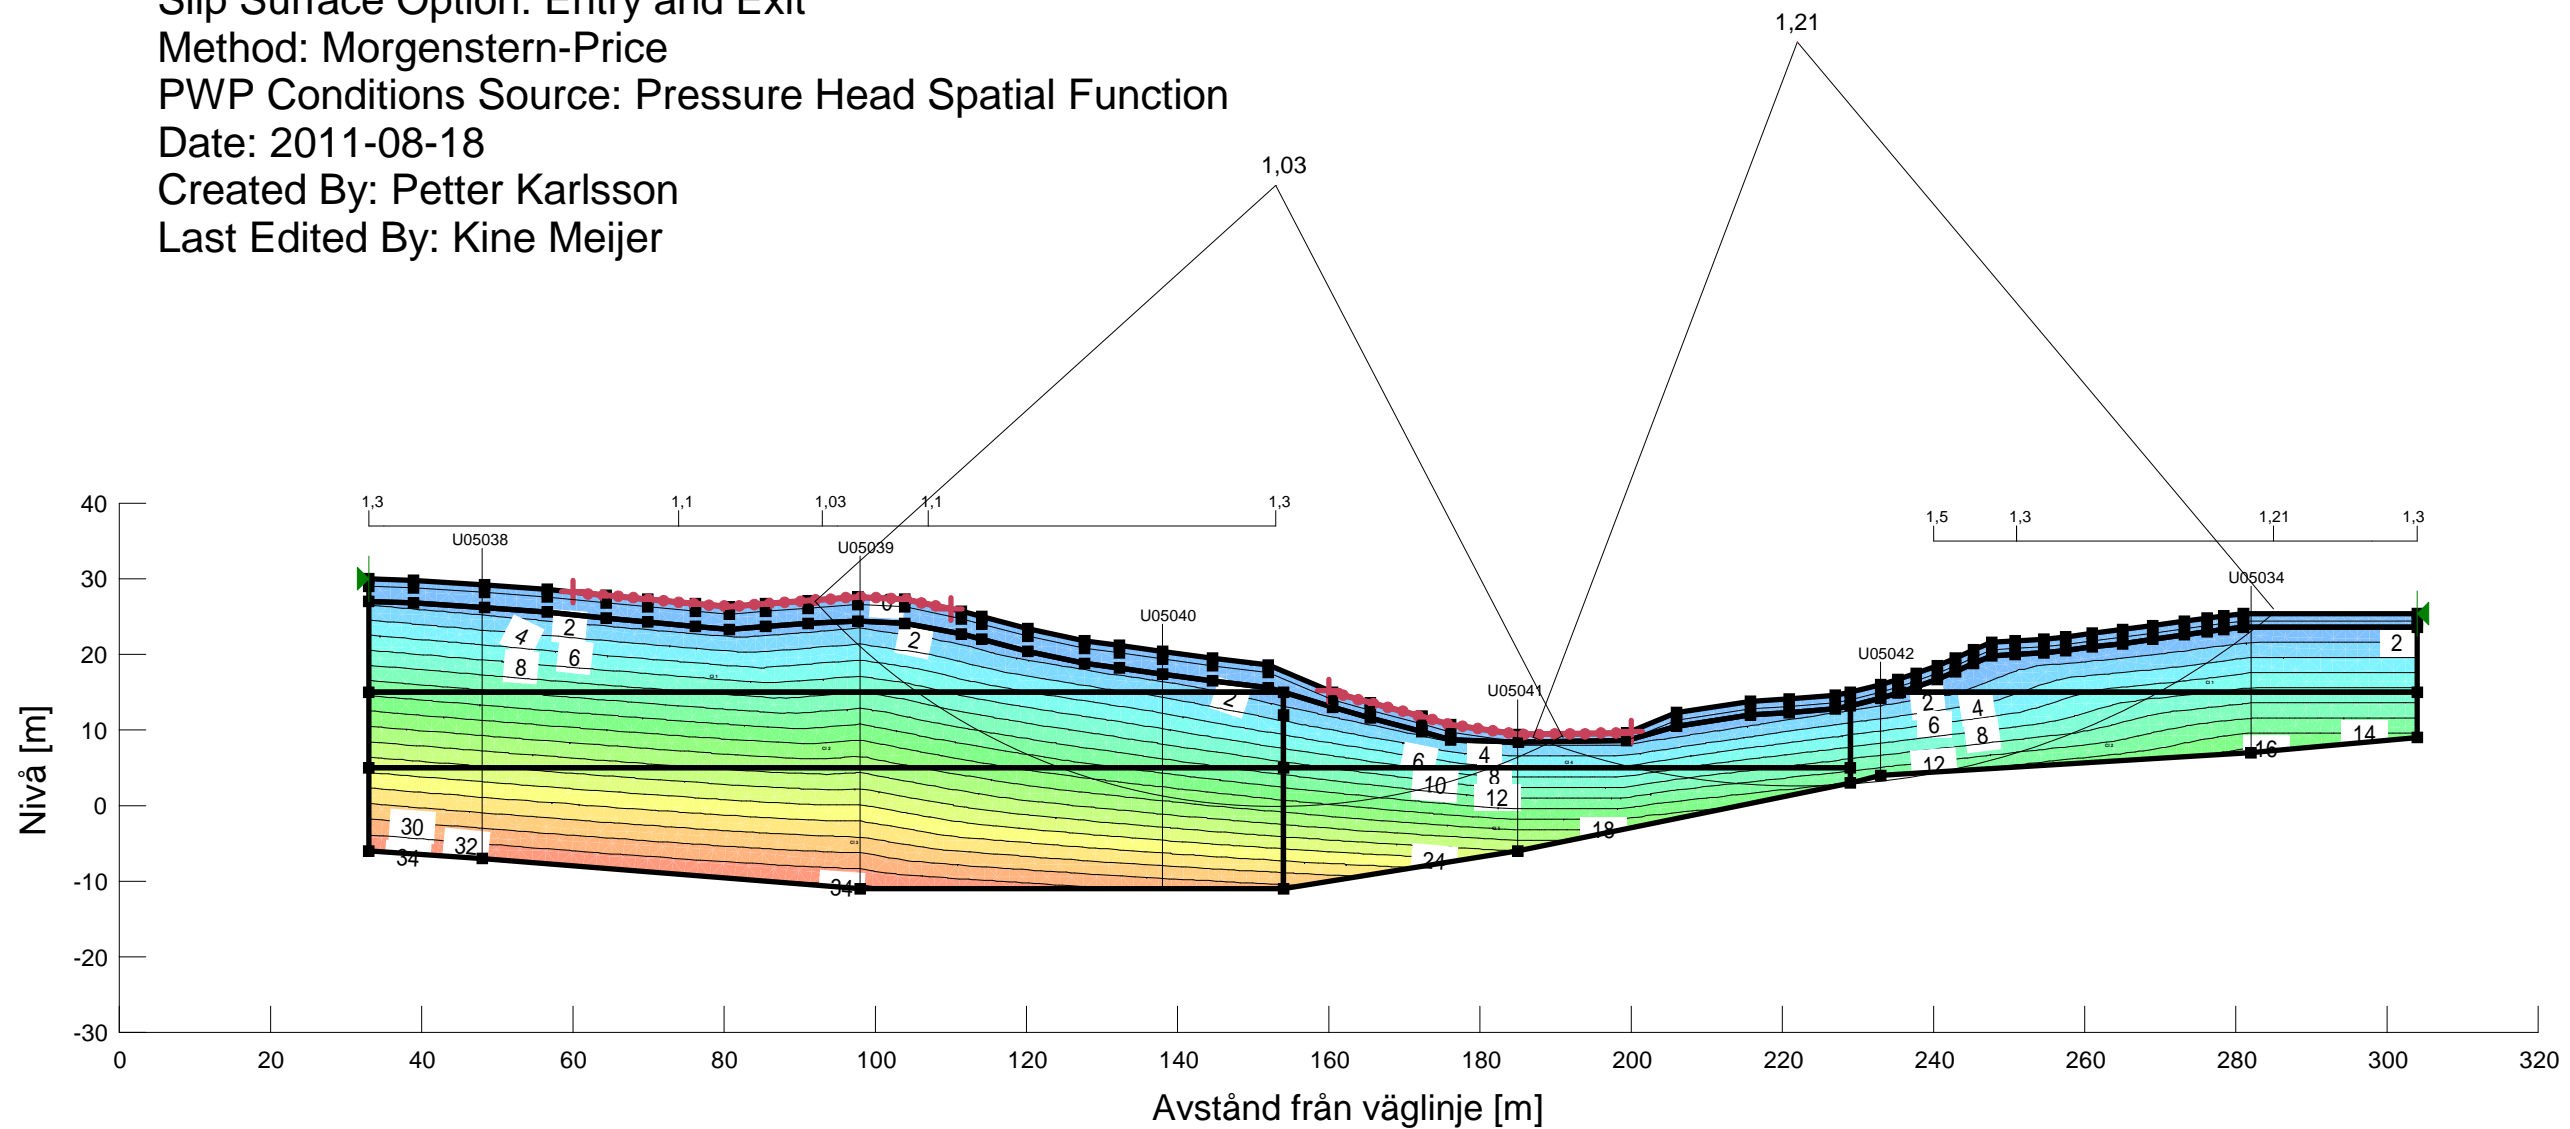

Skala 1:1000 (A3)

Name: Crust  
 Model: Combined,  $S=f(\text{depth})$   
 Unit Weight: 18 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Top of Layer: 30 kPa  
 Cu-Rate of Change: 0 kPa/m  
 C/Cu Ratio: 0.1

Name: CI 1  
 Model: Combined,  $S=f(\text{datum})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Datum: 28 kPa  
 Cu-Rate of Change: 0 kPa/m  
 C/Cu Ratio: 0.1  
 Elevation: 30 m

Name: CI 2  
 Model: Combined,  $S=f(\text{datum})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Datum: 28 kPa  
 Cu-Rate of Change: 1.81 kPa/m  
 C/Cu Ratio: 0.1  
 Elevation: 15 m

Name: CI 4  
 Model: Combined,  $S=f(\text{datum})$   
 Unit Weight: 16.4 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Datum: 28 kPa  
 Cu-Rate of Change: 0 kPa/m  
 C/Cu Ratio: 0.1  
 Elevation: 15 m

Name: CI 5  
 Model: Combined,  $S=f(\text{datum})$   
 Unit Weight: 17 kN/m<sup>3</sup>  
 Phi: 30 °  
 Cu-Datum: 28 kPa  
 Cu-Rate of Change: 2.1 kPa/m  
 C/Cu Ratio: 0.1  
 Elevation: 5 m

Directory: P:\!Göta älv utredningen 2009-2012\Delområde 1-10\Delområde 5-14085\Geoteknik\Text\Interngranskning\V18550\110816\

File Name: V18550\_kombinerad print.gsz